


## GF Silenta 3A branch 45deg 125-75mm

**1146692**

- Light blue, PP-material with inorganic filler, according to EN 1451

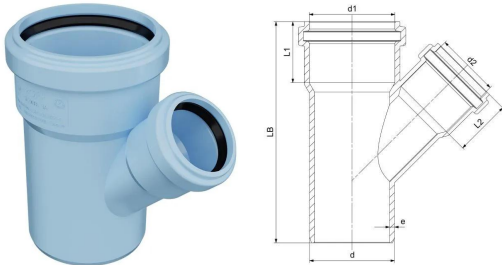

### Application information GF Silenta 3A branch 45deg

#### Specification

- Three-layer polypropylene soil and wastewater pipe system
- Compliant with DIN EN 1451, DIN 4109 and DIN 4102
- Designed for non-pressurized domestic drainage
- Pipe diameter range: DN 32 to DN 200
- Complete system including pipes, fittings and accessories

#### Application

- Residential buildings and apartment complexes
- Schools, libraries, hospitals and hotels
- Office buildings, administrative centers and conference facilities
- Sustainable and green building projects
- Industrial facilities, suitable for both short- and long-term wastewater applications

## GF Silenta 3A branch 45deg 125-75mm

1146692



### Status

Item Available From date 2026-02-01

### Product code

Item no EAN	8698652047690
Item no GF	4704212500821
Item no GTIN	08698652047690
Item no NOBB	60823857
Item no NRF	1486188
Item no RSK	2832021
Item no VVS	186733122

### Dimensions

Item Unit Height	290
Item Unit Length	145
Item Unit Weight	0,679
Item Unit Width	232
Item_UOM	pce

### Measurements

Length (l2)	51
Wall thickness_s	20
Z Measurement d2	75
Z Measurement e	3,1

### Packaging

Packaging GTIN PL1	06414900553124
Packaging GTIN PL2	06414900566766
Packaging GTIN PL4	06414900566773
Packaging Height PL1	290
Packaging Height PL2	360
Packaging Height PL4	924

Packaging Length PL1	145
Packaging Length PL2	590
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	10
Packaging Quantity PL4	80
Packaging Type PL1	Piece
Packaging Type PL2	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0097556
Packaging Volume PL2	0,082836
Packaging Volume PL4	0,88704
Packaging Weight PL1	0,679
Packaging Weight PL2	7,83
Packaging Weight PL4	87,64
Packaging Width PL1	232
Packaging Width PL2	390
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)