
Product data sheet



GF JRGUMAT union JRGUMAT 3400 DN20 DN10

1155716

- Made of DR brass (lead-free)
- to 3400 DN20 for circulation connection, with flat gasket
- Connection: male thread

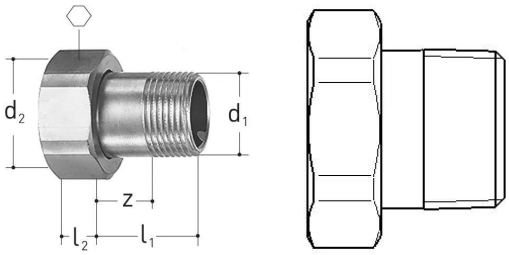

Application information GF JRGUMAT union JRGUMAT 3400 DN20

Specification


- Dimensionen: DN15 – DN80
- Temperaturbereich: 20-80°C, e.g. 25, 40, 55 and 70°C)

Application

- Potable water systems with requirement for constant mixed water temperature
- Central and decentralized hot water mixing for single and multifamily homes, hospitality buildings and sports facilities
- Excess temperature protection in systems using alternative forms of energy such as solar systems

GF JRGUMAT union JRGUMAT 3400 DN20 DN10

1155716

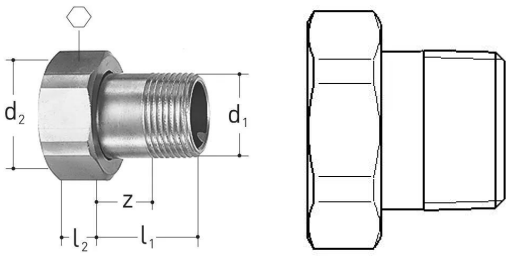

Product code

Item no EAN	7613263018854
Item no GF	350278401
Item no GTIN	07613263018854
Item no RSK	4893384

Dimensions

Item Unit Height	24
Item Unit Length	27
Item Unit Weight	0,04
Item Unit Width	26.5
Item_UOM	pce

Measurements

Length (l1)	22
Length (l2)	6
Z Measurement d	10

Packaging

Packaging GTIN PL1	06414900115148
Packaging Height PL1	60
Packaging Length PL1	120
Packaging Material (number) PL1	04
Packaging Material PL1	plastic film / film plastico
Packaging Material (short) PL1	PELD
Packaging Quantity PL1	1
Packaging Type PL1	Pouch
Packaging Volume PL1	0,000648
Packaging Weight PL1	0,043

Packaging Width PL1	90

Technical data

Recycling Text Block PL1	plastic film / film plastico

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+