


## Uponor Ecoflex VIP Thermo Pipe Twin 2X40X3,7/140

**1160612**

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing

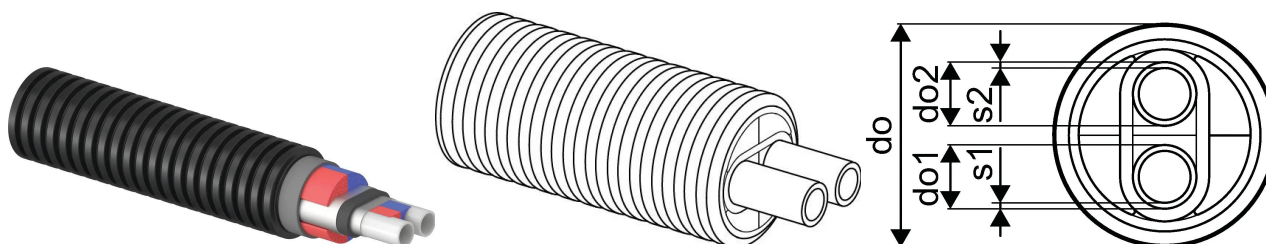

### Application information Uponor Ecoflex VIP Thermo Pipe Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex VIP Thermo Pipe Twin 2X40X3,7/140

1160612

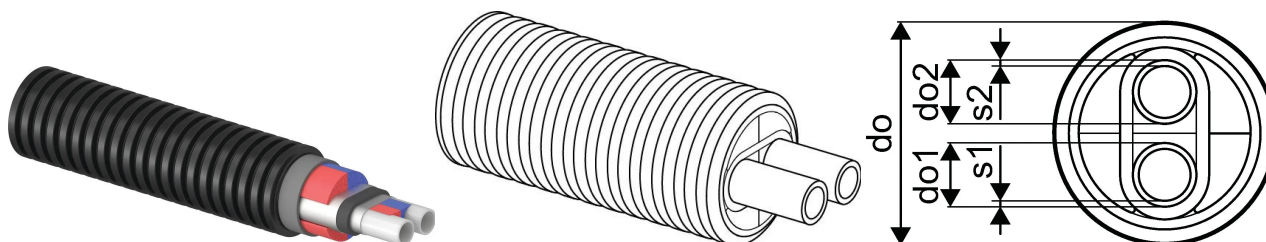

### Status

Item Available From date

2026-06-01

### Product code

Item no EAN	6414900506397
Item no GF	35001160612
Item no GTIN	06414900506397
Item no LVI	3010177
Item no NRF	1475898
Item no RSK	2523138

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	2,28
Item Unit Width	140
Item_UOM	m

### Measurements

Outer Diameter_do	140
Outer Diameter_do1	40
Outer Diameter_do2	40
Wall thickness_s1	3,7
Wall thickness_s2	3,7

### Packaging

Packaging GTIN PL1	06414900448628
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	6,05

Packaging Weight PL1

458

Packaging Width PL1

1250

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

E  
communications@georgfischer.  
com