
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S15 32x3,0 blue 25m

1184448

- coil
- Insulation thickness 15 mm
- thermal conductivity λ=0,040 W/mk
- round extruded

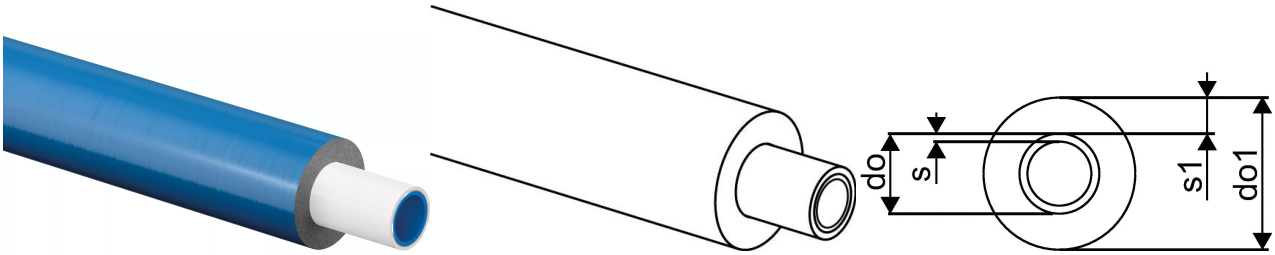

Application information GF Uponor Uni Pipe PLUS white insulated S15

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white insulated S15 32x3,0 blue 25m

1184448

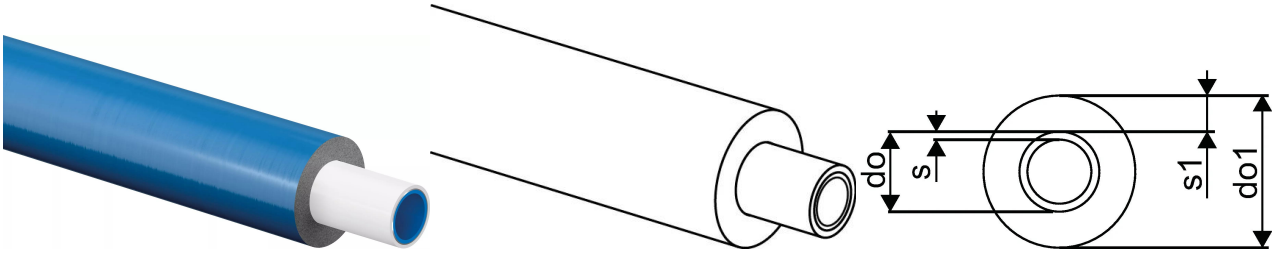

Status

Item Available From date	2025-08-05

Product code

Item no EAN	6414900395137
Item no GF	35001184448
Item no GTIN	06414900395137
Item no LVI	1720870
Item no NRF	1510328
Item no RSK	2523126
Item no VVS	087481132

Dimensions

Item Unit Height	67
Item Unit Length	1000
Item Unit Weight	0,407
Item Unit Width	67
Item_UOM	m

Measurements

Outer Diameter_do	32
Z MEASUREMENT S	3

Packaging

Packaging GTIN PL1	06414900085830
Packaging GTIN PL4	06414900085847
Packaging Height PL1	254
Packaging Height PL4	1850
Packaging Length PL1	1140
Packaging Length PL4	1140

Packaging Quantity PL1	25
Packaging Quantity PL4	175
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3300984
Packaging Volume PL4	2,40426
Packaging Weight PL1	13,363
Packaging Weight PL4	126
Packaging Width PL1	1140
Packaging Width PL4	1140

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+