


GF HT-PP white sleeve socket 32mm

1184632

- White, PP-material, according to EN 1451

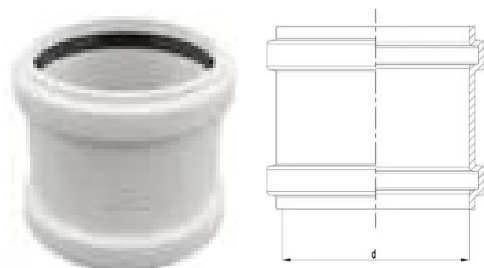

Application information GF HT-PP white sleeve socket

Specification


- The system is made from monolayer polypropylene (PP) to ensure reliable performance in standard drainage applications.
- It is designed for non-pressurized soil and wastewater drainage in residential and commercial buildings.
- The system is fully compliant with EN 1451-1 for plastic soil and waste discharge and EN 13501 for fire classification.
- It achieves fire performance rating E according to EN 13501.
- The pipes are suitable for short-term exposure to high-temperature wastewater.
- The material provides high resistance to chemicals commonly found in domestic and commercial wastewater.
- The push-fit socket design with integrated sealing rings ensures quick installation and leak-tight connections.
- The system is available in nominal diameters ranging from DN 32 to DN 200.

Application

- Residential buildings
- Office buildings and conference facilities
- Schools, libraries, hospitals, and hotels
- Underground and above-ground house drainage
- Sustainable / green building projects
- Industrial facilities (short- and long-term use)
- Wastewater from kitchens, bathrooms, and household appliances (e.g. washing machines, dishwashers)

GF HT-PP white sleeve socket 32mm

1184632

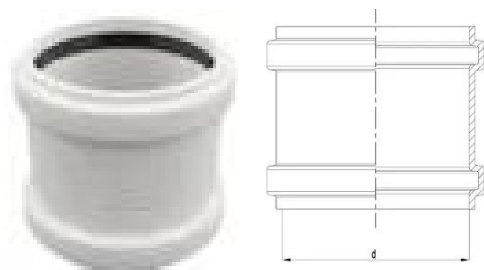

Status

Item Available From date 2026-02-01

Product code

Item no EAN	6414900085021
Item no GF	4900503200221
Item no GTIN	06414900085021
Item no VVS	186543332

Dimensions

Item Unit Height	90
Item Unit Length	38
Item Unit Weight	0,027
Item Unit Width	38
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900085601
Packaging Height PL1	400
Packaging Length PL1	800
Packaging Quantity PL1	600
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,192
Packaging Weight PL1	17,46
Packaging Width PL1	600

Measurements

Z Measurement d	32,4
-----------------	------

Documents

Page with all documents



com

ner.