


Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202

- Operating pressure 10 bar
- Coil

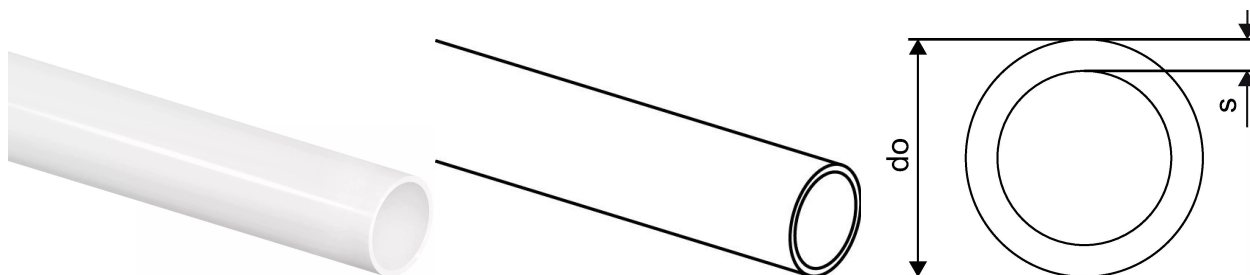

About Uponor Aqua Pipe natural PN10

Application

- Hot water services - where the water temperature does not continuously exceed 70°C, maximum design pressure of 6 bar (conditions to class 2 - BS EN ISO 15875-1:2003). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.
- Cold water services <20 °C - where the maximum system pressure does not exceed the maximum operating pressure of 10 bar.
- Uponor Q&E Shrink-fit system can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Hot water services'

Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202



Technical data

Item no EAN	7321500031701
Item no GTIN	07321500031701
Item no VVS	087210025
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	400
Packaging GTIN PL1	06414905250677
Packaging GTIN PL4	06414905250691
Item Unit Height	25 mm
Item Unit Weight	0,236 kg
Item Unit Width	25 mm

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb