


Uponor Radi Pipe natural PN6 32x2,9 50m

1001220

- Operating pressure 6 bar
- Coil

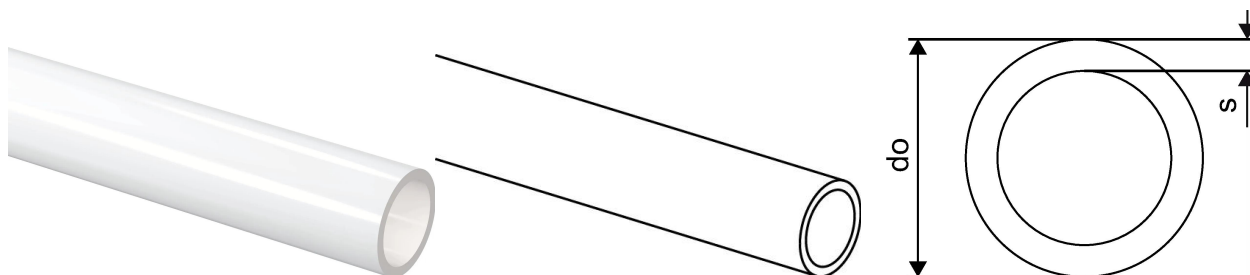

About Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 32x2,9 50m

1001220

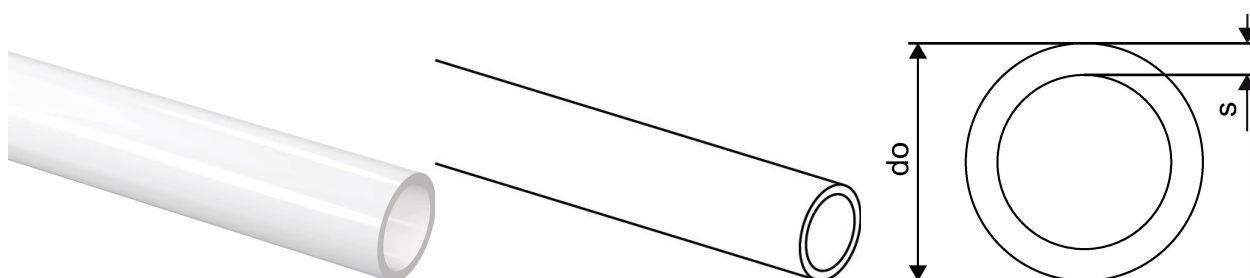

Product code

Item no EAN	7321500044916
Item no GF	35001001220
Item no GTIN	07321500044916
Item no LVI	2012132
Item no NOBB	41947125
Item no NRF	8362309
Item no RSK	2418022
Item no VVS	087230032

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,276
Item Unit Width	32
Item_UOM	m

Measurements

Outer Diameter_do	32
Wall thickness_s	2,9

Packaging

Packaging GTIN PL1	06414905250813
Packaging GTIN PL4	06414905250820
Packaging Height PL1	150
Packaging Height PL4	1800
Packaging Length PL1	930
Packaging Length PL4	950
Packaging Quantity PL1	50
Packaging Quantity PL4	550
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,129735
Packaging Volume PL4	1,6245
Packaging Weight PL1	14,5
Packaging Weight PL4	171
Packaging Width PL1	930
Packaging Width PL4	950

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb