


Uponor Minitec ring natural 9,9x1,1

1005263

- PE-Xa

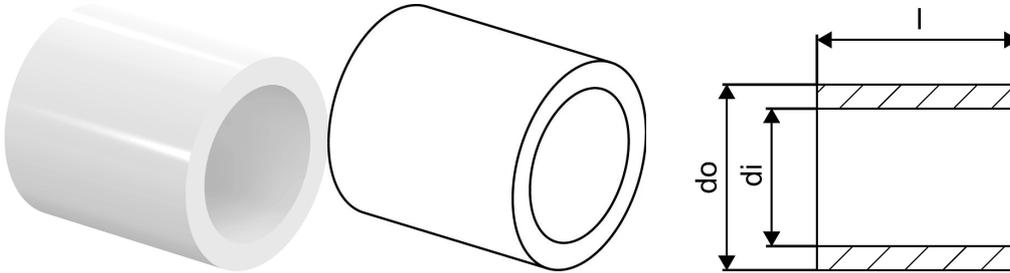

About Uponor Minitec ring natural

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- Designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- For use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- Fire class E to BS EN 13501-1 (pipe and panels)
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- Radiant underfloor heating and cooling
- Very low construction height
- For use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec ring natural 9,9x1,1

1005263

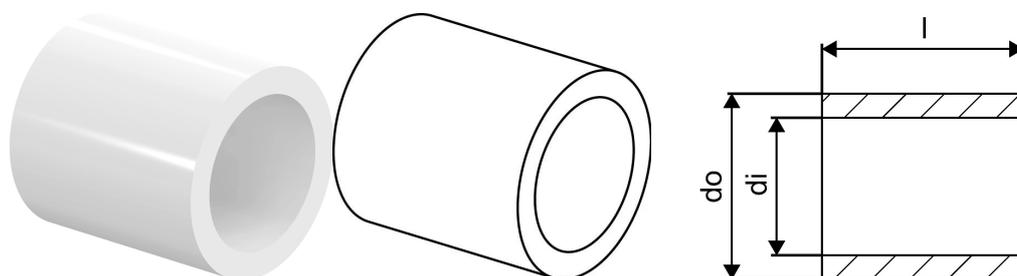

Measurements

Inner_diameter_di	10,3
LENGTH_L	15
Outer Diameter_do	13,9

Product code

Item no EAN	7321500013981
Item no GF	35001005263
Item no GTIN	07321500013981
Item no LVI	2072961

Dimensions

Item Unit Height	15
Item Unit Length	10
Item Unit Weight	0,001
Item Unit Width	10
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905251889
Packaging GTIN PL3	06414905251896
Packaging GTIN PL4	06414905251902
Packaging Height PL1	15
Packaging Height PL3	280
Packaging Height PL4	948
Packaging Length PL1	70
Packaging Length PL3	280
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	1600
Packaging Quantity PL4	57600

Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00004725
Packaging Volume PL3	0,0196
Packaging Volume PL4	0,91008
Packaging Weight PL1	0,011
Packaging Weight PL3	2
Packaging Weight PL4	83,176
Packaging Width PL1	45
Packaging Width PL3	250
Packaging Width PL4	800

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb