


Uponor Minitec coupling, rings 9,9x1,1

1005264

- Q&E
- Made of Brass
- With Q&E rings

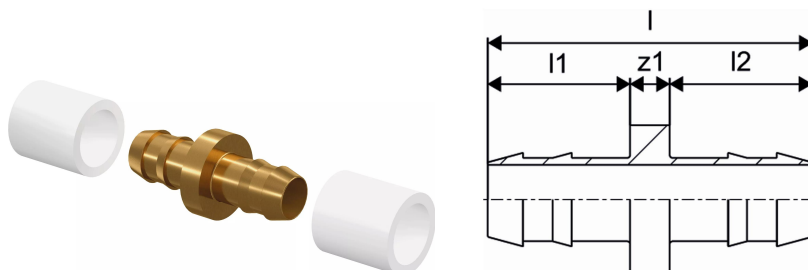

About Uponor Minitec coupling, rings

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec coupling, rings 9,9x1,1

1005264

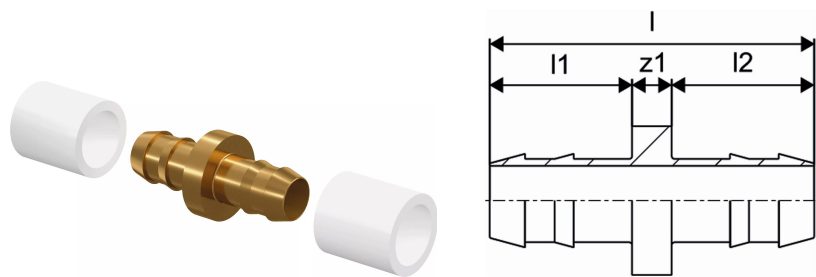

Technical data

Item (unit of measurement)	pce
Item no LVI	2024559
Length (l)	33 mm
Length (l1)	14 mm
Length (l2)	14 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	100
Packaging Quantity PL4	9600

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb