


Uponor Contec ceiling pipe lead through DDE 20mm

1005376

- Patented element is designed that after concreting, the pipes can be pulled out under the ceiling slab and connected to the manifold or supply line below the ceiling.
- For pipes up to 20 mm.
- Stackable for alignment to other elements.
- A small red flag indicates pull direction of the pipe.
- Delivered including nails for fixing to supports.
- Length: 540 mm
- Width: 39 mm
- Height: 29 mm
- Max. height: 57 mm (at the connection point)

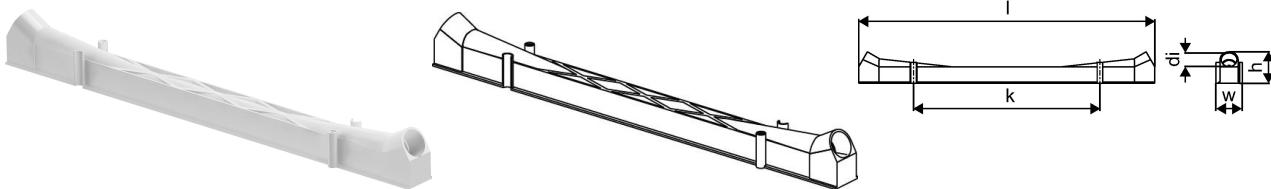

About Uponor Contec ceiling pipe lead through DDE


Specification

- pipes fixed on steel mats

Application

- TABS

Uponor Contec ceiling pipe lead through DDE 20mm 1005376

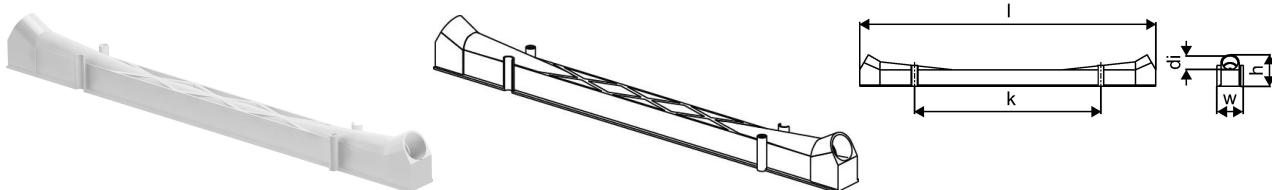

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb