
Product data sheet



GF Uponor S-Press jaw Mini KSP0 25

1007094

- Mini KSP0 jaws for Mini 32 tool
- Uponor pressing jaws for Uponor S-Press and S-Press PLUS fittings

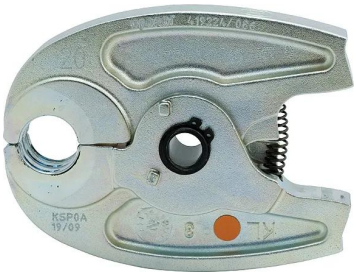

About GF Uponor S-Press jaw Mini KSP0

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:
Male and female threads acc.to EN 10226-1.

GF Uponor S-Press jaw Mini KSP0 25

1007094

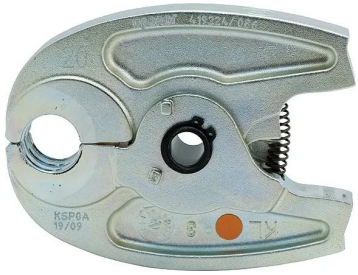

Product code

Item no EAN	4021598100237
Item no GF	35001007094
Item no GTIN	04021598100237
Item no LVI	1725945
Item no NOBB	47367634
Item no NRF	5071291
Item no RSK	1877187
Item no VVS	045498425

Dimensions

Item Unit Height	16
Item Unit Length	125
Item Unit Weight	1,017
Item Unit Width	94
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905433551
Packaging GTIN PL3	06414905444816
Packaging Height PL1	35
Packaging Height PL3	172
Packaging Length PL1	110
Packaging Length PL3	180
Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box

Packaging Volume PL1	0,0005005
Packaging Volume PL3	0,00554184
Packaging Weight PL1	1,042
Packaging Weight PL3	5,4
Packaging Width PL1	130
Packaging Width PL3	179

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+