
Product data sheet



GF Uponor S-Press jaw Mini KSP0 32

1007095

- Mini KSP0 jaws for Mini 32 tool
- Uponor pressing jaws for Uponor S-Press and S-Press PLUS fittings

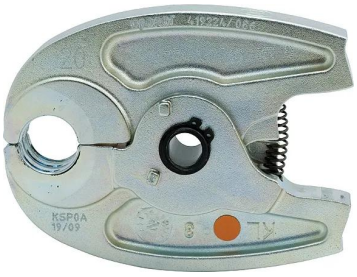

About GF Uponor S-Press jaw Mini KSP0

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:
Male and female threads acc.to EN 10226-1.

GF Uponor S-Press jaw Mini KSP0 32

1007095

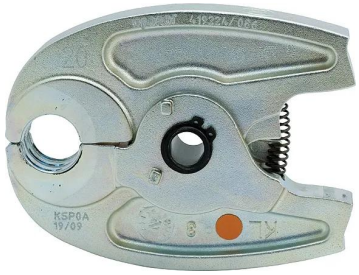

Product code

Item no EAN	4021598100244
Item no GF	35001007095
Item no GTIN	04021598100244
Item no LVI	1725946
Item no NOBB	47367645
Item no NRF	5071292
Item no RSK	1877188
Item no VVS	045498432

Dimensions

Item Unit Height	17
Item Unit Length	125
Item Unit Weight	0,94
Item Unit Width	95
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905433568
Packaging GTIN PL3	06414905444823
Packaging Height PL1	19
Packaging Height PL3	120
Packaging Length PL1	127
Packaging Length PL3	200
Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box

Packaging Volume PL1	0,000234061
Packaging Volume PL3	0,0048
Packaging Weight PL1	0,96
Packaging Weight PL3	4,9
Packaging Width PL1	97
Packaging Width PL3	200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+