
Product data sheet



GF Uponor Ecoflex wall seal PWP 140

1007360

- For concrete core hole or fibre cement pipe
- Part to seal the casing pipe
- Applicable for PWP (pressurized water)
- Watertight up to 0,3bar

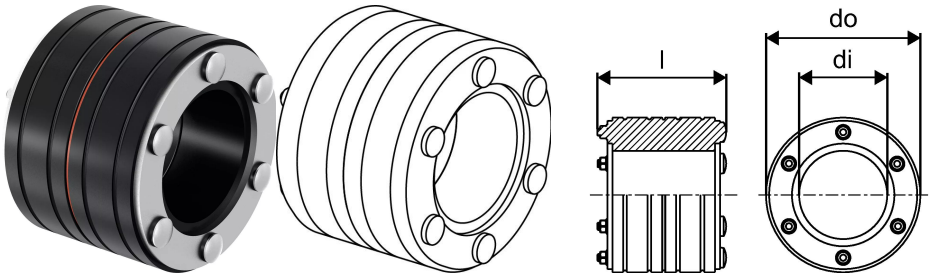

About GF Uponor Ecoflex wall seal PWP

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed for all below ground buried installations

Certification

-

GF Uponor Ecoflex wall seal PWP 140

1007360

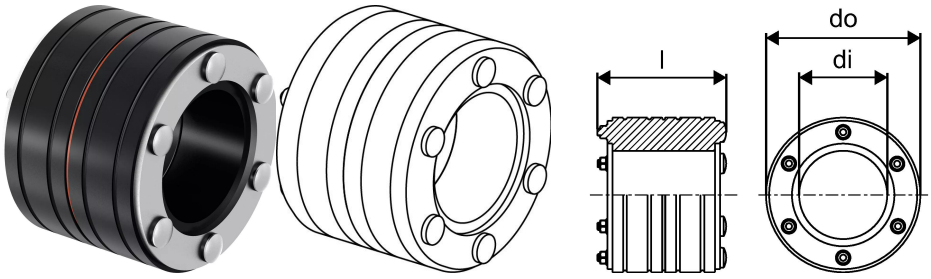

Measurements

Inner_diameter_di	140
LENGTH_L	110
Outer Diameter_do	200

Product code

Item no EAN	4021598101029
Item no GF	35001007360
Item no GTIN	04021598101029
Item no NRF	8361407
Item no VVS	087916214

Dimensions

Item Unit Height	200
Item Unit Length	110
Item Unit Weight	2,236
Item Unit Width	200
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414900507905
Packaging Height PL1	110
Packaging Length PL1	205
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,00462275
Packaging Weight PL1	5,0097
Packaging Width PL1	205

Technical data

Recycling Text Block PL1	Corrugated fibreboard

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+