


Uponor Ecoflex wall seal PWP 200

1007362

- For concrete core hole or fibre cement pipe
- Part to seal the casing pipe
- Applicable for PWP (pressurized water)
- Watertight up to 0,3bar

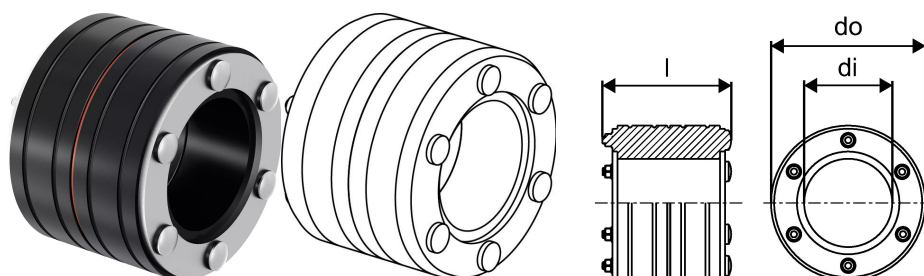

About Uponor Ecoflex wall seal PWP

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed for all below ground buried installations

Certification

-

Uponor Ecoflex wall seal PWP 200

1007362

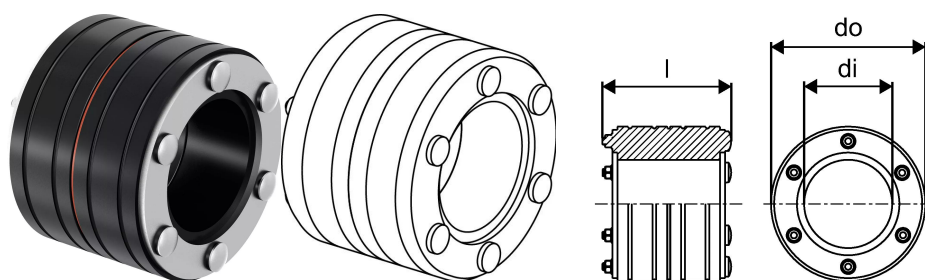

Measurements

Inner_diameter_di	200
LENGTH_L	110
Outer Diameter_do	300

Product code

Item no EAN	4021598101043
Item no GF	35001007362
Item no GTIN	04021598101043
Item no VVS	087916220

Dimensions

Item Unit Height	300
Item Unit Length	110
Item Unit Weight	5,238
Item Unit Width	300
Item_UOM	pce

Technical data

Recycling Text Block PL1	Corrugated fibreboard
--------------------------	-----------------------

Packaging

Packaging GTIN PL1	06414905433643
Packaging Height PL1	115
Packaging Length PL1	305
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,010697875
Packaging Weight PL1	5,38

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb