


Uponor Radi Pipe natural PN6 32x2,9 100m

1008449

- Operating pressure 6 bar
- Coil

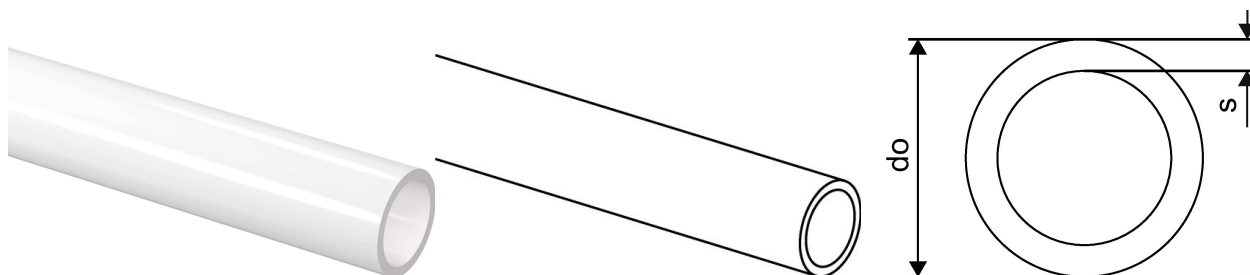

About Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 32x2,9 100m

1008449

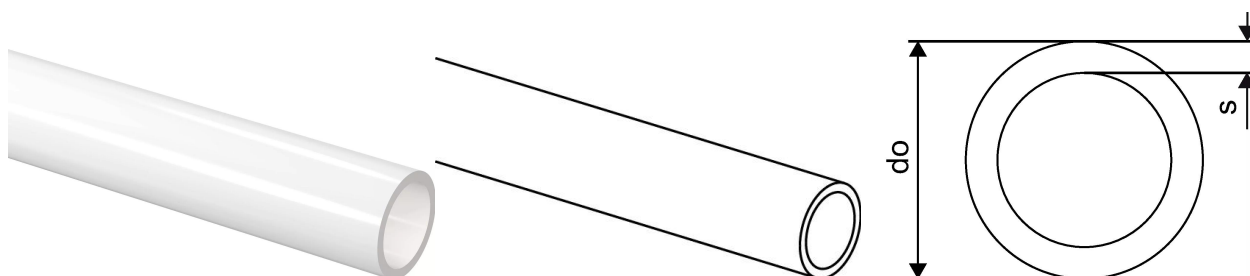

Technical data

Item no EAN	7321500044923
Item no GTIN	07321500044923
Item no VVS	087230132
RSK no.	2418015
Item no NRF	8362313
Item no LVI	2012133
Item (unit of measurement)	m
Packaging Quantity 1	100
Packaging Quantity 4	700
Packaging GTIN PL1	06414905252695
Packaging GTIN PL4	06414905252718
Item Unit Height	32 mm
Item Unit Weight	0,268 kg
Item Unit Width	32 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb