


## Uponor Radi Pipe natural PN6 32x2,9 100m

1008449

- Operating pressure 6 bar
- Coil

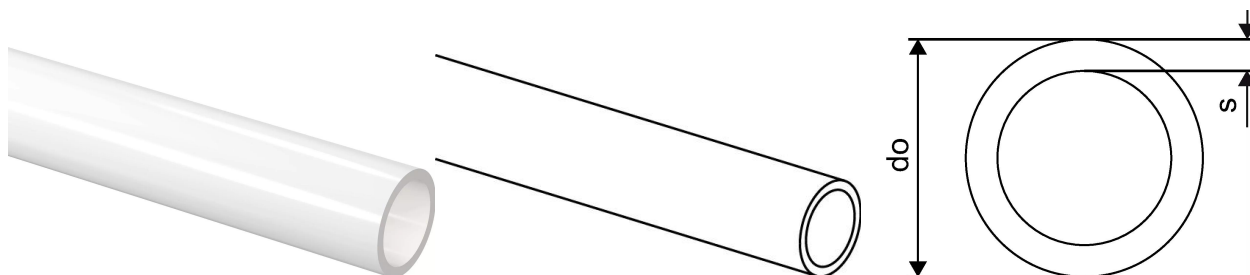

### About Uponor Radi Pipe natural PN6

#### Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 32x2,9 100m

1008449



### Product code

Item no EAN	7321500044923
Item no GF	35001008449
Item no GTIN	07321500044923
Item no LVI	2012133
Item no NOBB	41949524
Item no NRF	8362313
Item no RSK	2418015
Item no VVS	087230132

### Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,268
Item Unit Width	32
Item_UOM	m

### Measurements

Outer Diameter_do	32
Wall thickness_s	2,9

### Packaging

Packaging GTIN PL1	06414905252695
Packaging GTIN PL4	06414905252718
Packaging Height PL1	190
Packaging Height PL4	950
Packaging Length PL1	1160
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	700
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,255664
Packaging Volume PL4	0,912
Packaging Weight PL1	26,8
Packaging Weight PL4	212,6
Packaging Width PL1	1160
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)