


Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940

- Operating pressure 6 bar
- 6 m bars

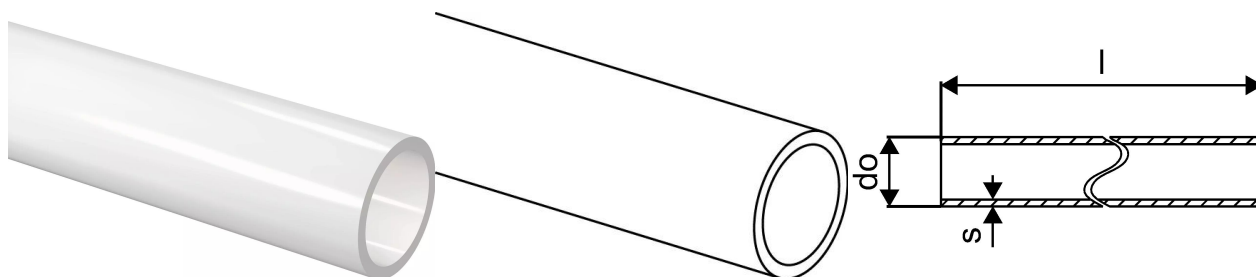

About Uponor Radi Pipe natural PN6 S

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940



Technical data

Item no EAN	7321500018078
Item no GTIN	07321500018078
Item no VVS	087229150
RSK no.	2418233
Item (unit of measurement)	m
Packaging Quantity 1	6
Packaging Quantity 4	660
Packaging GTIN PL1	06414905422067
Packaging GTIN PL4	06414905662869
Item Unit Height	50 mm
Item Unit Weight	0,665 kg
Item Unit Width	50 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb