


Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

- Operating pressure 6 bar
- 6m bars

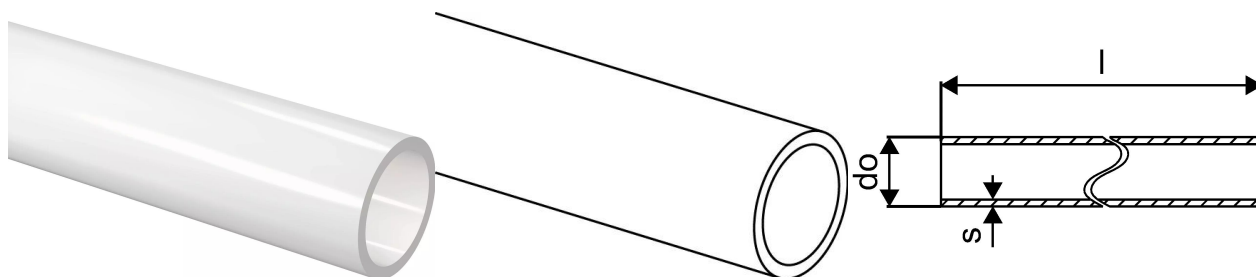

About Uponor Radi Pipe natural PN6 S

Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941



Product code

| | |
|--------------|----------------|
| Item no EAN | 7321500018085 |
| Item no GF | 35001008941 |
| Item no GTIN | 07321500018085 |
| Item no RSK | 2418235 |
| Item no VVS | 087229163 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 63 |
| Item Unit Length | 1000 |
| Item Unit Weight | 1,065 |
| Item Unit Width | 63 |
| Item_UOM | m |

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Measurements

| | |
|-------------------|-----|
| Outer Diameter_do | 63 |
| Wall thickness_s | 5,8 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905422036 |
| Packaging GTIN PL4 | 06414905662876 |
| Packaging Height PL1 | 65 |
| Packaging Height PL4 | 700 |
| Packaging Length PL1 | 6000 |
| Packaging Length PL4 | 6100 |
| Packaging Quantity PL1 | 6 |
| Packaging Quantity PL4 | 420 |
| Packaging Type PL1 | Piece |
| Packaging Type PL4 | Wooden_Cage |

| | |
|----------------------|---------|
| Packaging Volume PL1 | 0,02535 |
| Packaging Volume PL4 | 2,7755 |
| Packaging Weight PL1 | 6,288 |
| Packaging Weight PL4 | 250 |
| Packaging Width PL1 | 65 |
| Packaging Width PL4 | 650 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb