


## Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

- Operating pressure 6 bar
- 6m bars

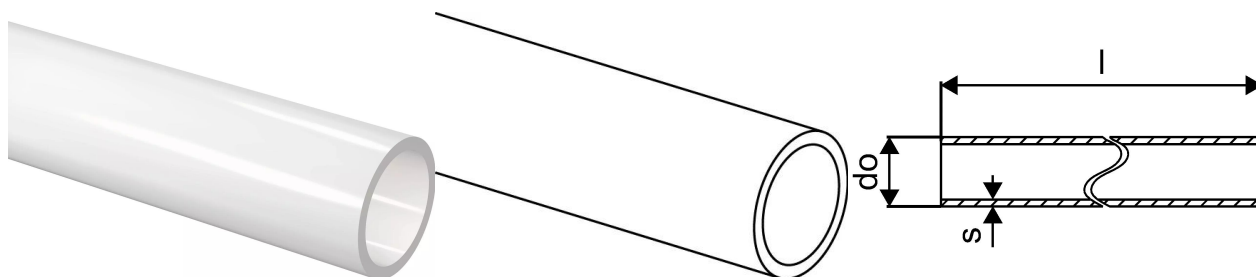

### About Uponor Radi Pipe natural PN6 S

#### Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

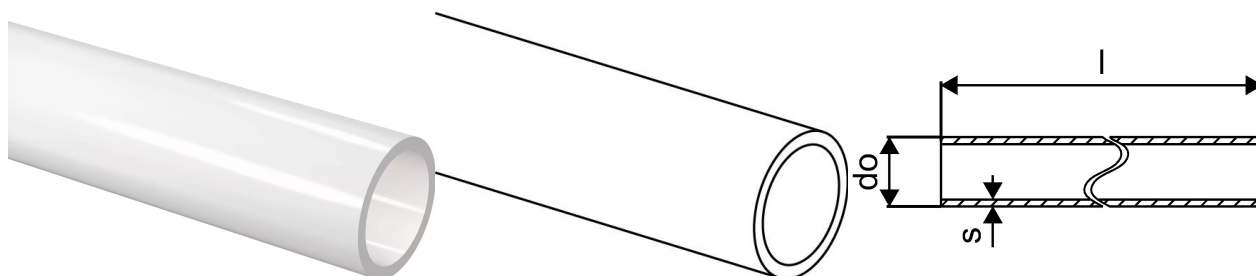

### Product code

Item no EAN	7321500018085
Item no GF	35001008941
Item no GTIN	07321500018085
Item no RSK	2418235
Item no VVS	087229163

### Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,048
Item Unit Width	63
Item_UOM	m

### Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

### Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

### Packaging

Packaging GTIN PL1	06414905422036
Packaging GTIN PL4	06414905662876
Packaging Height PL1	65
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	420
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage

Packaging Volume PL1	0,02535
Packaging Volume PL4	2,7755
Packaging Weight PL1	6,288
Packaging Weight PL4	250
Packaging Width PL1	65
Packaging Width PL4	650

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)