


## Uponor Radi Pipe natural PN6 40x3,7 100m

1008975

- Operating pressure 6 bar
- Coil

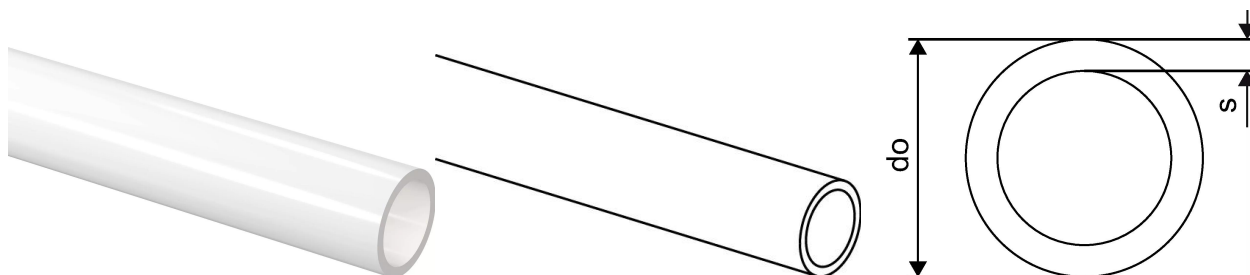

### About Uponor Radi Pipe natural PN6

#### Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 40x3,7 100m

1008975



### Product code

Item no EAN	7321500018290
Item no GF	35001008975
Item no GTIN	07321500018290
Item no LVI	2012141
Item no NOBB	41949532
Item no NRF	8362317
Item no RSK	2418016
Item no VVS	087230140

### Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,43
Item Unit Width	40
Item_UOM	m

### Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

### Packaging

Packaging GTIN PL1	06414905255788
Packaging GTIN PL4	06414905255795
Packaging Height PL1	1320
Packaging Height PL4	1894
Packaging Length PL1	1320
Packaging Length PL4	1320
Packaging Quantity PL1	100
Packaging Quantity PL4	700
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,4356
Packaging Volume PL4	3,3001056
Packaging Weight PL1	43
Packaging Weight PL4	326
Packaging Width PL1	250
Packaging Width PL4	1320

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)