


## Uponor Radi Pipe natural PN6 40x3,7 50m

1008979

- Operating pressure 6 bar
- Coil

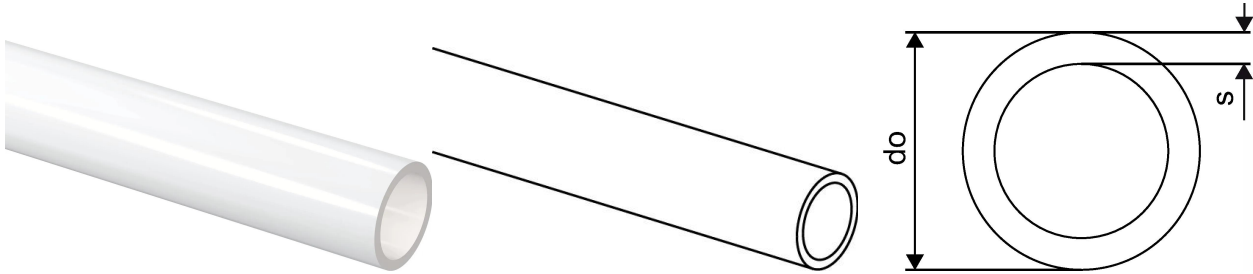

### About Uponor Radi Pipe natural PN6

#### Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 40x3,7 50m

1008979

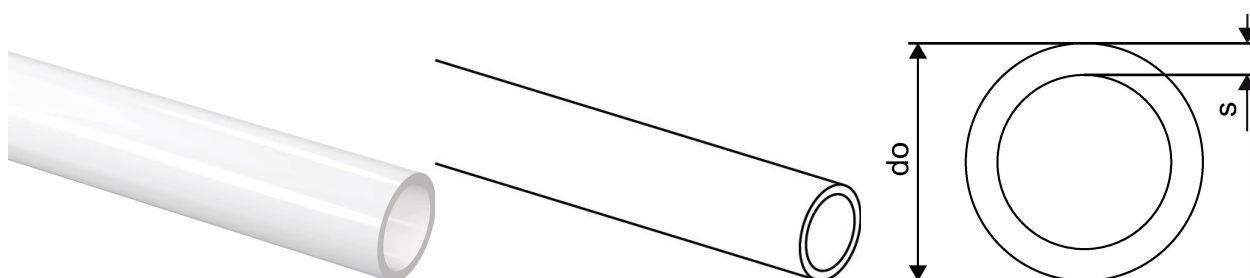

### Product code

Item no EAN	7321500018474
Item no GF	35001008979
Item no GTIN	07321500018474
Item no LVI	2012140
Item no NOBB	41947133
Item no NRF	8362315
Item no RSK	2418023
Item no VVS	087230340

### Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,47
Item Unit Width	40
Item_UOM	m

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

### Packaging

Packaging GTIN PL1	06414905255825
Packaging GTIN PL4	06414905255832
Packaging Height PL1	230
Packaging Height PL4	1710
Packaging Length PL1	1070
Packaging Length PL4	1150
Packaging Quantity PL1	50

Packaging Quantity PL4	350
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,263327
Packaging Volume PL4	2,261475
Packaging Weight PL1	23,5
Packaging Weight PL4	176
Packaging Width PL1	1070
Packaging Width PL4	1150

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)