


## Uponor Radi Pipe natural PN6 50x4,6 50m

**1008980**

- Operating pressure 6 bar
- Coil

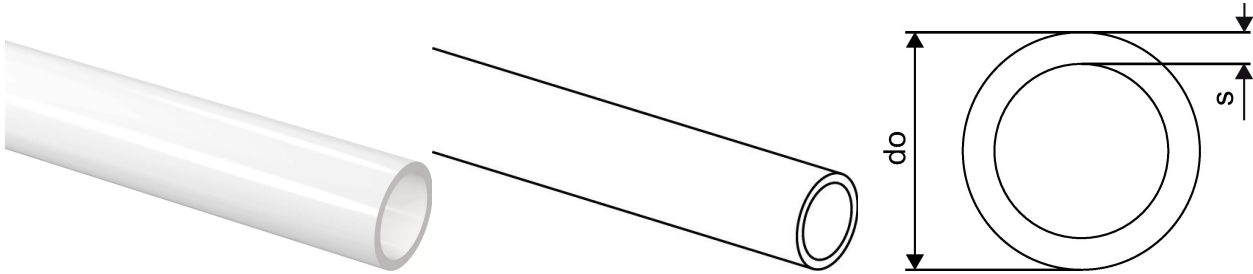

### About Uponor Radi Pipe natural PN6

#### Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 50x4,6 50m

1008980

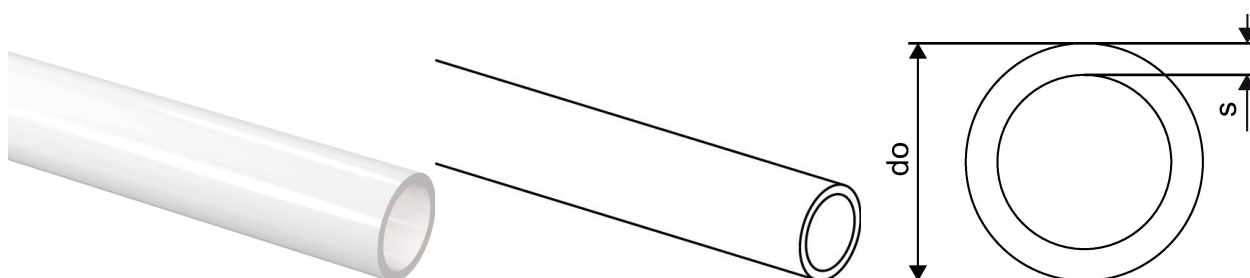

### Product code

Item no EAN	7321500018481
Item no GF	35001008980
Item no GTIN	07321500018481
Item no LVI	2012152
Item no NOBB	41947144
Item no NRF	8362319
Item no RSK	2418024
Item no VVS	087230350

### Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,675
Item Unit Width	50
Item_UOM	m

### Measurements

Outer Diameter_do	50
Wall thickness_s	4,6

### Packaging

Packaging GTIN PL1	06414905255849
Packaging GTIN PL4	06414905255856
Packaging Height PL1	190
Packaging Height PL4	1474
Packaging Length PL1	1250
Packaging Length PL4	1250
Packaging Quantity PL1	50
Packaging Quantity PL4	350
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,296875
Packaging Volume PL4	2,303125
Packaging Weight PL1	35,2
Packaging Weight PL4	271,4
Packaging Width PL1	1250
Packaging Width PL4	1250

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)