


## Uponor Radi Pipe natural PN6 63X5,8 50m

1008981

- Operating pressure 6 bar
- Coil

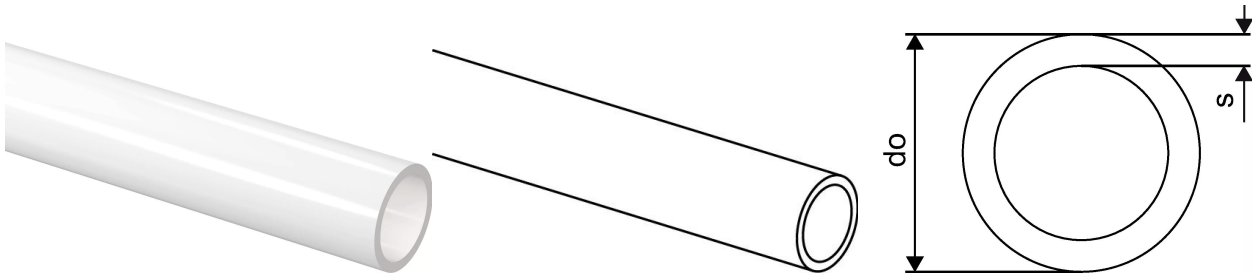

### About Uponor Radi Pipe natural PN6

#### Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 63X5,8 50m

1008981



### Product code

Item no EAN	7321500018498
Item no GF	35001008981
Item no GTIN	07321500018498
Item no LVI	2012165
Item no NOBB	41947152
Item no NRF	8362324
Item no RSK	2418025
Item no VVS	89523063

### Dimensions

Item Unit Height	60
Item Unit Length	1000
Item Unit Weight	1,065
Item Unit Width	60
Item_UOM	m

### Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

### Packaging

Packaging GTIN PL1	06414905255863
Packaging Height PL1	250
Packaging Length PL1	1790
Packaging Quantity PL1	50
Packaging Type PL1	Coil
Packaging Volume PL1	0,801025
Packaging Weight PL1	55,8
Packaging Width PL1	1790

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)