


## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982

- Operating pressure 6 bar
- Coil

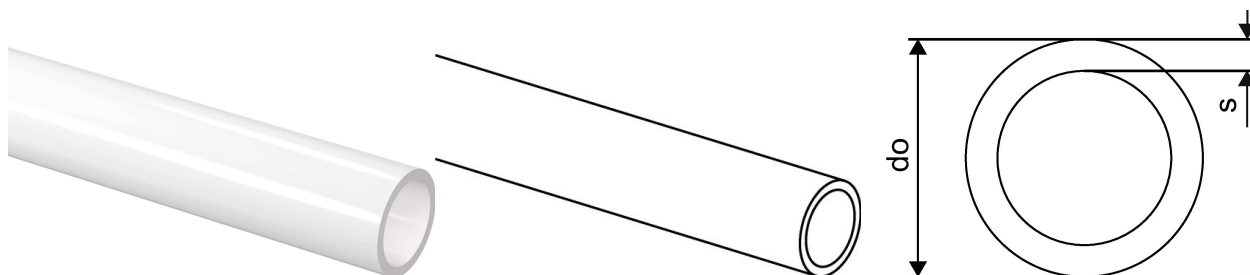

### About Uponor Radi Pipe natural PN6

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982

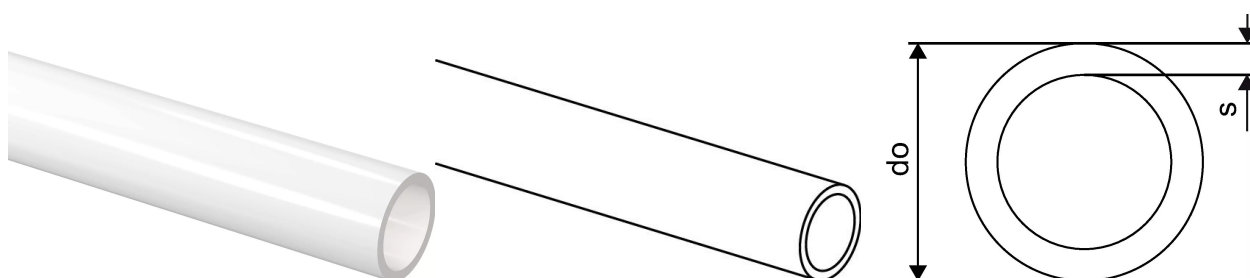

### Technical data

Item no EAN	7321500018504
Item no GTIN	07321500018504
Item no VVS	087230375
RSK no.	2418026
Item no NRF	8362328
Item no LVI	2012175
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	50
Packaging GTIN PL1	06414905255870
Packaging GTIN PL4	06414905476589
Item Unit Height	75 mm
Item Unit Weight	1,461 kg
Item Unit Width	75 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)