


## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982

- Operating pressure 6 bar
- Coil

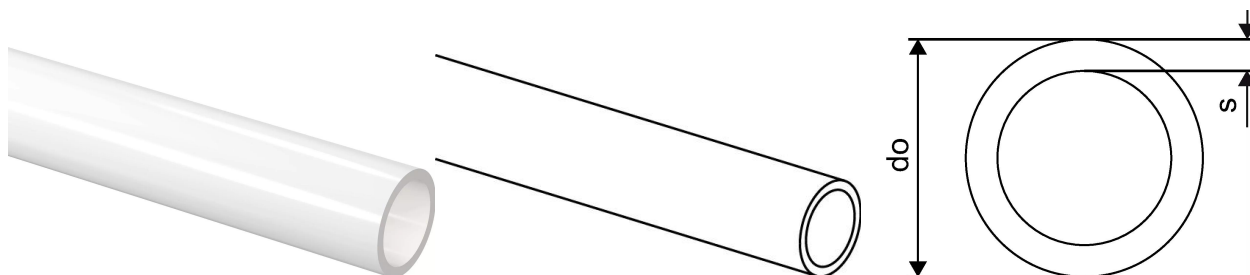

### About Uponor Radi Pipe natural PN6

#### Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982



### Product code

Item no EAN	7321500018504
Item no GF	35001008982
Item no GTIN	07321500018504
Item no LVI	2012175
Item no NOBB	41947163
Item no NRF	8362328
Item no RSK	2418026
Item no VVS	087230375

### Dimensions

Item Unit Height	75
Item Unit Length	1000
Item Unit Weight	1,461
Item Unit Width	75
Item_UOM	m

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Measurements

Outer Diameter_do	75
Wall thickness_s	6,9

### Packaging

Packaging GTIN PL1	06414905255870
Packaging GTIN PL4	06414905476589
Packaging Height PL1	2150
Packaging Height PL4	1600
Packaging Length PL1	2150
Packaging Length PL4	1150
Packaging Quantity PL1	50

Packaging Quantity PL4	50
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	1,849
Packaging Volume PL4	2,116
Packaging Weight PL1	73,05
Packaging Weight PL4	450
Packaging Width PL1	400
Packaging Width PL4	1150

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)