


## Uponor Vario B flowmeter WGF G3/4 2-8 l/min

1009142

- Made of brass

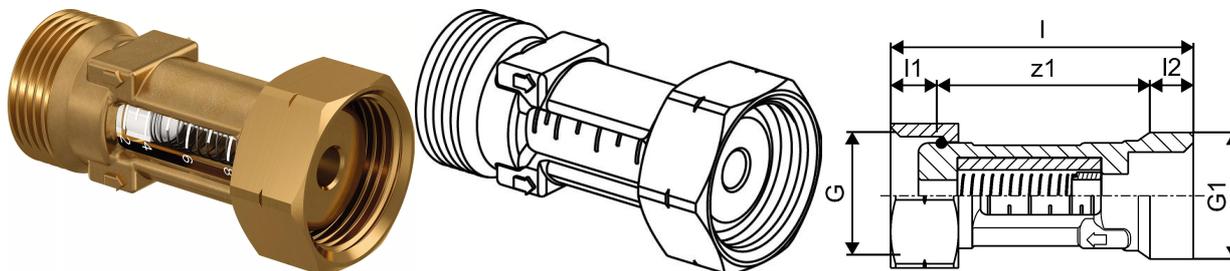

### About Uponor Vario B flowmeter WGF

#### Specification


- Made of brass
- With integrated valves
- Connection right or left with flat sealing supply
- With lockshield valve or flowmeter for balancing and shutoff
- no primary connection to combine it with the correct accessories
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

#### Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

## Uponor Vario B flowmeter WGF G3/4 2-8 l/min

1009142

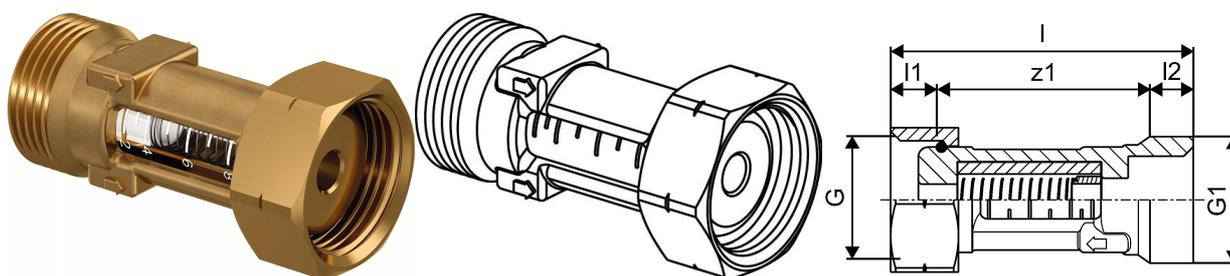

### Measurements

Cylindric_thread_G	3/4
Cylindric_thread_G1	3/4
LENGTH_L	62,5
Length (I1)	9,5
Length (I2)	9
z1	44

### Status

Item Available Till date 2028-12-31T00:00:00.000+0100

### Product code

Item no EAN	7321500030827
Item no GTIN	07321500030827
Item no LVI	2025652
Item no NOBB	47652106
Item no NRF	8362131
Item no RSK	4876088
Item no VVS	046265106

### Dimensions

Item Unit Height	55
Item Unit Length	29
Item Unit Weight	0,12
Item Unit Width	29
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905434589
Packaging Height PL1	100
Packaging Length PL1	200
Packaging Quantity PL1	12

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0012
Packaging Weight PL1	1,44
Packaging Width PL1	60

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)