


Uponor Vario PLUS hose connection G3/4 x 1/2

1009214

- Fits Vario PLUS manifold end connection for filling/pressure test
- R 3/4"



About Uponor Vario PLUS hose connection

Specification

- Modular fiberglass-reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- Connection right or left with flat sealing, or connection from below with optional elbow set
- Supplied with lockshield (LS) valve for balancing, or supplied with Flowmeter (FM) for balancing
- Shut-off and flow view
- Adjusting ring for balancing without tools
- Prepared are to apply room name labels
- Return with valves and caps, prepared for actuators
- Loop connection G3/4" Eurocone
- Loop pitch 50 mm
- Header pitch 225 mm

Actuator: NC (normally closed) closes without power

Application



- For underfloor heating and cooling
- Compatible with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS hose connection G3/4 x 1/2

1009214

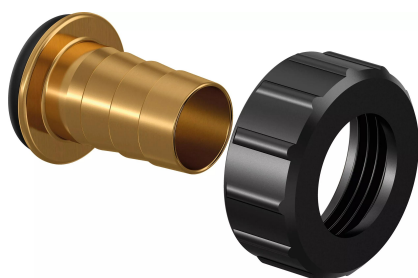

Measurements

Cylindric_thread_G	0,75
LENGTH_L	35
Length (l1)	8,8
Length (l2)	22,8
z1	3,4

Product code

Item no EAN	4016203841827
Item no GF	35001009214
Item no GTIN	04016203841827
Item no LVI	2026815
Item no NOBB	41948018
Item no NRF	8362666
Item no RSK	2418976
Item no VVS	087602176

Dimensions

Item Unit Height	30
Item Unit Length	20
Item Unit Weight	0,01
Item Unit Width	20
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905434701
Packaging GTIN PL3	06414905445158
Packaging Height PL1	30
Packaging Height PL3	135
Packaging Length PL1	25
Packaging Length PL3	135

Packaging Quantity PL1	1
Packaging Quantity PL3	10
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,000015
Packaging Volume PL3	0,000820125
Packaging Weight PL1	0,03
Packaging Weight PL3	0,35
Packaging Width PL1	20
Packaging Width PL3	45

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb