


Uponor Vario PLUS distance

1009215

- Manifold single segments for mixed loop connection from top and bottom

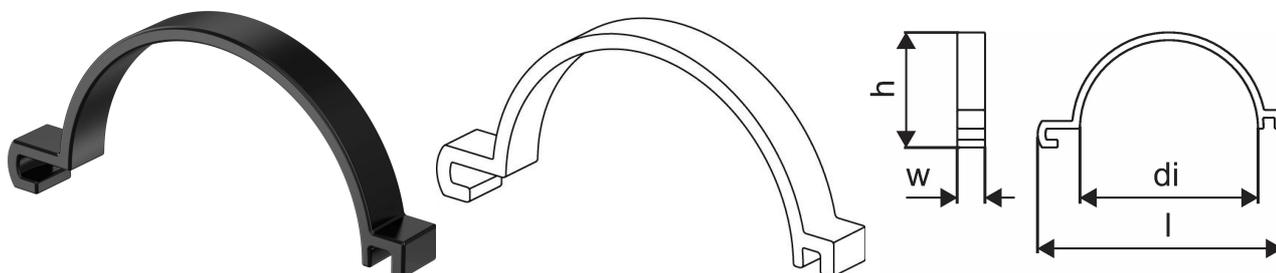

About Uponor Vario PLUS distance

Specification

- Modular fiberglass-reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" Eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator: NC (normally closed) closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS distance

1009215

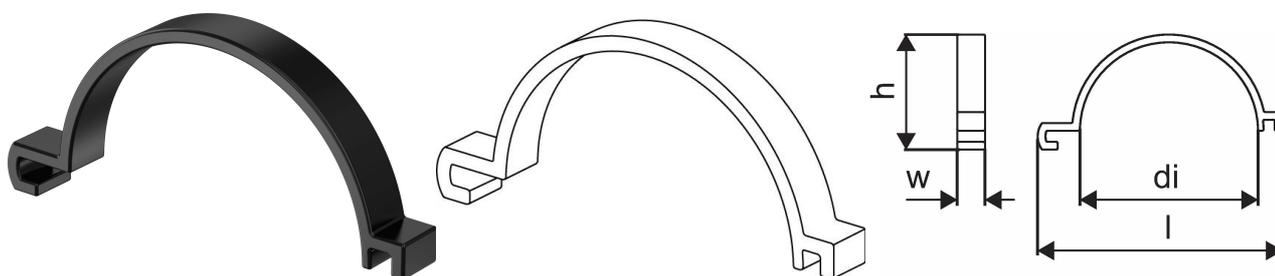

Product code

Item no EAN	4016203841834
Item no GF	35001009215
Item no GTIN	04016203841834
Item no LVI	2025831
Item no NOBB	41948022
Item no NRF	8362667
Item no RSK	2418977
Item no VVS	087604168

Dimensions

Item Unit Height	5
Item Unit Length	50
Item Unit Weight	0,046
Item Unit Width	15
Item_UOM	pce

Measurements

LENGTH_L	220
Z Measurement h	104
Z Measurement w1	25

Packaging

Packaging GTIN PL1	06414900385169
Packaging GTIN PL3	06414900385176
Packaging Height PL1	20
Packaging Height PL3	135
Packaging Length PL1	50
Packaging Length PL3	135
Packaging Quantity PL1	4
Packaging Quantity PL3	40

Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,00002
Packaging Volume PL3	0,000820125
Packaging Weight PL1	0,25
Packaging Weight PL3	2,6
Packaging Width PL1	20
Packaging Width PL3	45

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb