


Uponor Comfort Pipe PLUS 20x2,0 120m

1009228

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

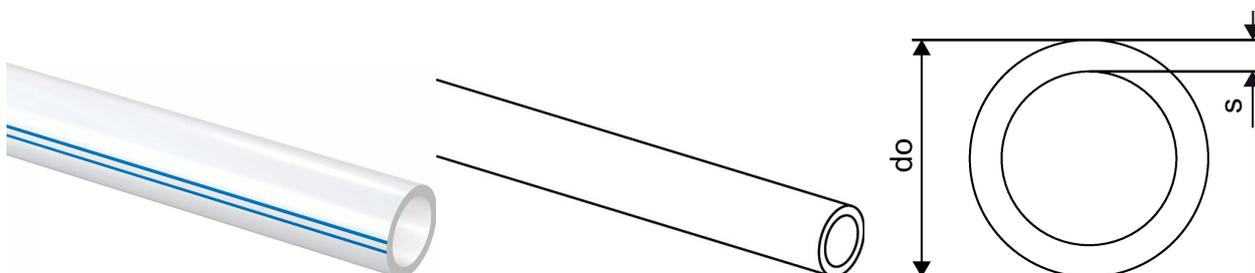

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 20x2,0 120m

1009228

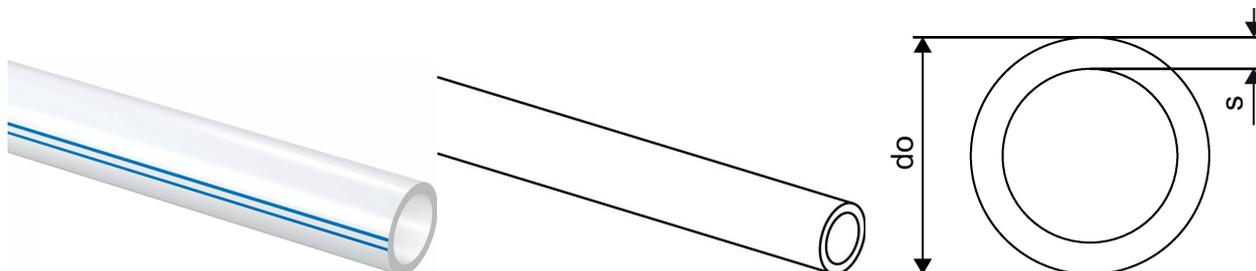

Technical data

Item no EAN	7321500044350
Item no GTIN	07321500044350
Item no VVS	087217120
RSK no.	2418241
Item no NRF	8361971
Item no LVI	2018165
Item (unit of measurement)	m
Packaging Quantity 1	120
Packaging Quantity 4	840
Packaging GTIN PL1	06414905256143
Packaging GTIN PL4	06414905256150
Item Unit Height	20 mm
Item Unit Weight	0,115 kg
Item Unit Width	20 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb