


Uponor Comfort Pipe PLUS 20x2,0 240m

1009230

- UFH pipe made of PE-Xa
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

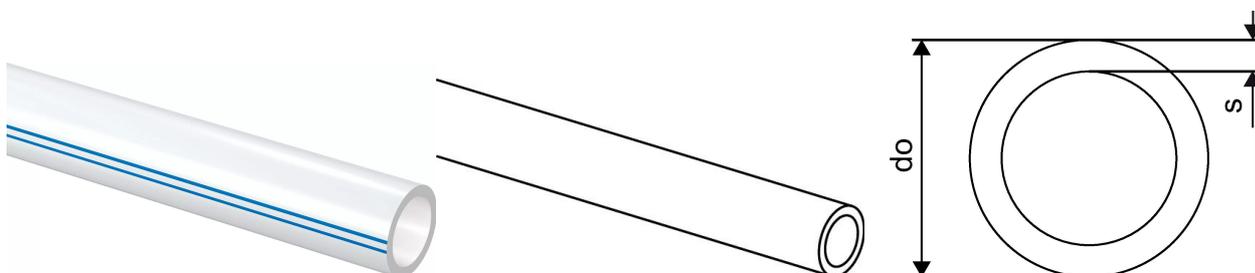

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 20x2,0 240m

1009230

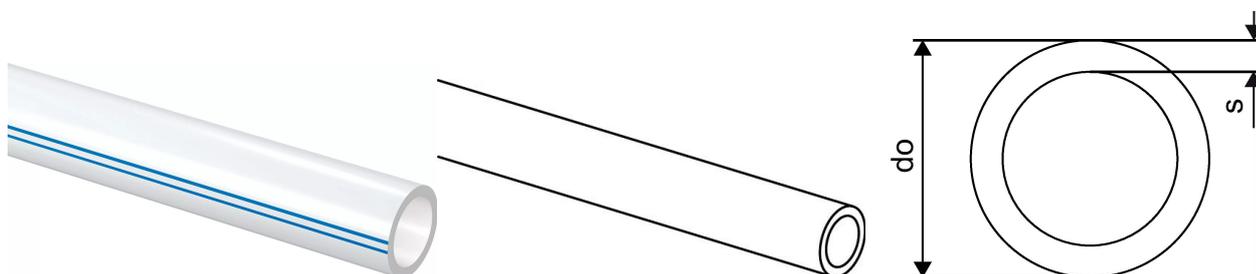

Product code

Item no EAN	7321500044367
Item no GF	35001009230
Item no GTIN	07321500044367
Item no LVI	2018168
Item no NOBB	47652197
Item no NRF	8361973
Item no RSK	2418242
Item no VVS	087217124

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905256181
Packaging GTIN PL4	06414905256198
Packaging Height PL3	780
Packaging Height PL4	950
Packaging Length PL3	780
Packaging Length PL4	1200
Packaging Quantity PL3	240
Packaging Quantity PL4	960
Packaging Type PL3	Box

Packaging Type PL4	Pallet
Packaging Volume PL3	0,16731
Packaging Volume PL4	0,912
Packaging Weight PL3	29
Packaging Weight PL4	138
Packaging Width PL3	275
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb