


## Uponor Comfort Pipe PLUS 20x2,0 1000m

**1009232**

- UFH pipe made of PE-Xa
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

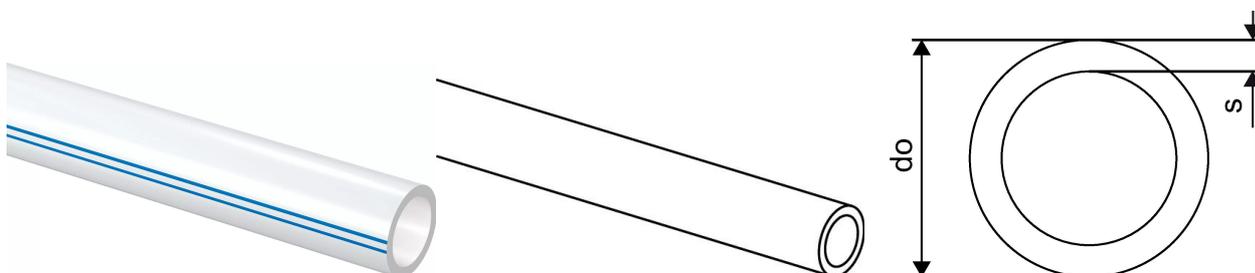

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 20x2,0 1000m

1009232

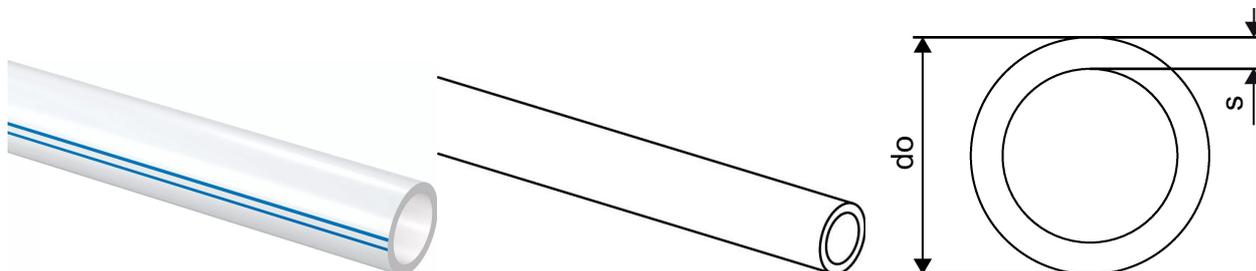

### Product code

Item no EAN	7321500044381
Item no GF	35001009232
Item no GTIN	07321500044381
Item no LVI	2018174
Item no NOBB	41949475
Item no NRF	8361977
Item no RSK	2418244
Item no VVS	087217100

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

### Measurements

Outer Diameter_do	20
Wall thickness_s	2

### Packaging

Packaging GTIN PL4	06414905636402
Packaging Height PL4	764
Packaging Length PL4	1040
Packaging Quantity PL4	1000
Packaging Type PL4	Pallet
Packaging Volume PL4	0,8263424
Packaging Weight PL4	142,5
Packaging Width PL4	1040

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)