


## Uponor Comfort Pipe PLUS 20x2,0 1000m

1009232

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

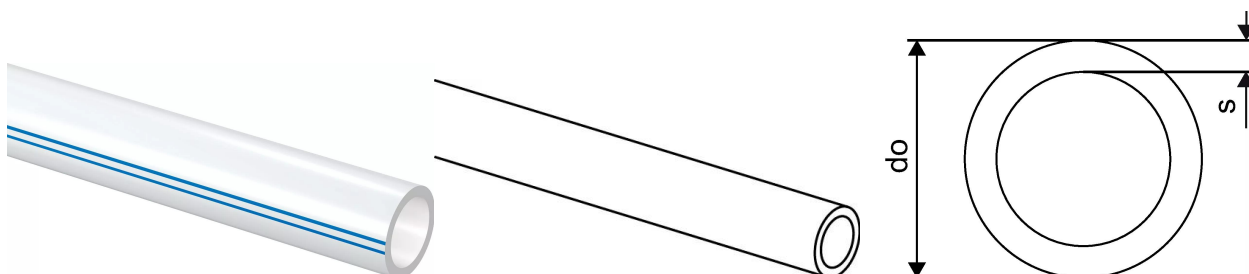

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 20x2,0 1000m

1009232

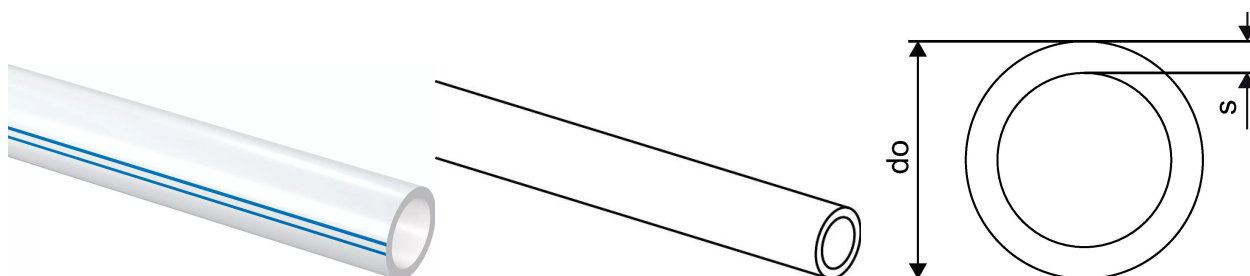

### Technical data

Item no EAN	7321500044381
Item no GTIN	07321500044381
Item no VVS	087217100
RSK no.	2418244
Item no NRF	8361977
Item no LVI	2018174
Item (unit of measurement)	m
Packaging Quantity 4	1000
Packaging GTIN PL4	06414905636402
Item Unit Height	20 mm
Item Unit Weight	0,115 kg
Item Unit Width	20 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)