


## Uponor Vario S actuator NC 230V FT30x1,5

**1013006**

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

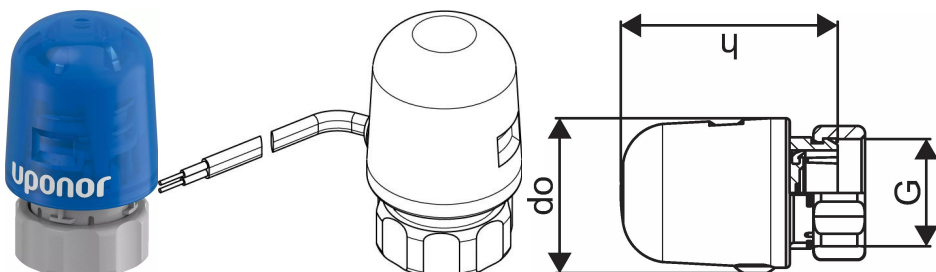

### About Uponor Vario S actuator NC

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S actuator NC 230V FT30x1,5

1013006

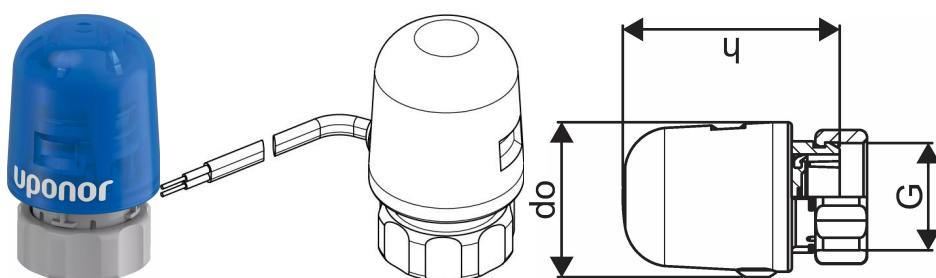

### Technical data

Item no EAN	4021598002937
Item no GTIN	04021598002937
Item no VVS	466234402
Item no LVI	2025233
Item (unit of measurement)	pce
Z-measurement h	56 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Packaging GTIN PL1	06414905584987
Packaging GTIN PL3	06414905584994
Packaging GTIN PL4	06414905635795
Item Unit Height	64 mm
Item Unit Weight	0,11 kg
Item Unit Width	40 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)