


Uponor Vario S actuator NC 24V FT30x1,5

1013008

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

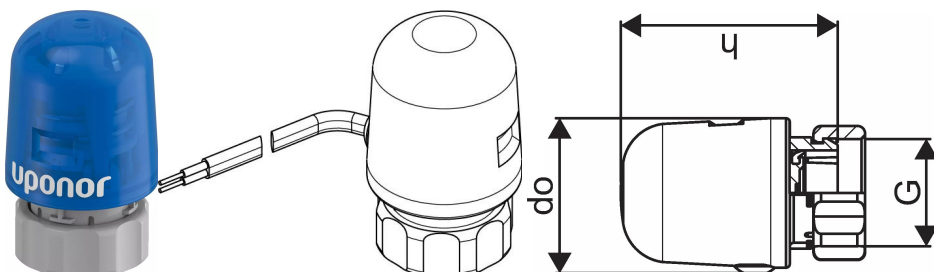

About Uponor Vario S actuator NC

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S actuator NC 24V FT30x1,5

1013008

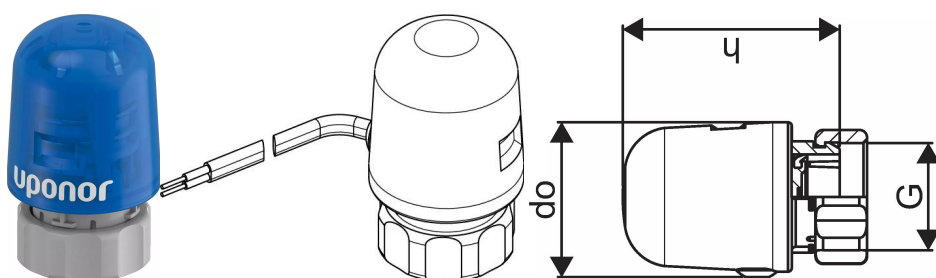

Technical data

Item no EAN	4021598005808
Item no GTIN	04021598005808
Item no VVS	466234401
RSK no.	2989176
Item no LVI	2025234
Item (unit of measurement)	pce
Z-measurement h	56 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Item Replacement 1	1141677
Packaging GTIN PL1	06414905585014
Packaging GTIN PL3	06414905585021
Packaging GTIN PL4	06414905635764
Item Unit Height	63 mm
Item Unit Weight	0,11 kg
Item Unit Width	40 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb