


## Uponor Uni Pipe PLUS white 14x2,0 200m

**1013366**

- Coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

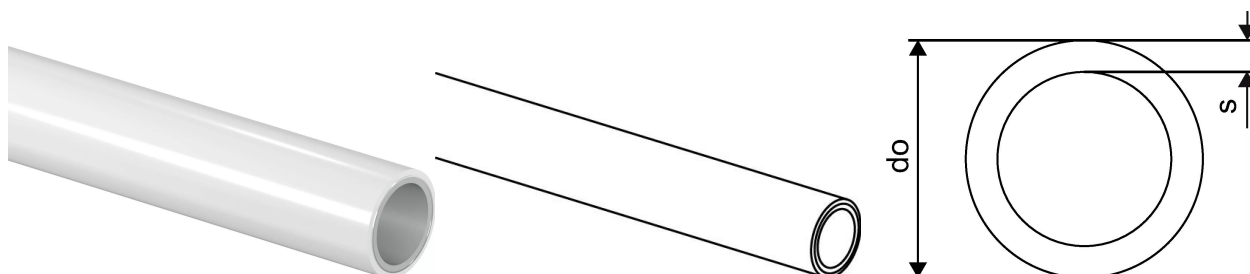

## About Uponor Uni Pipe PLUS white

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white 14x2,0 200m

1013366

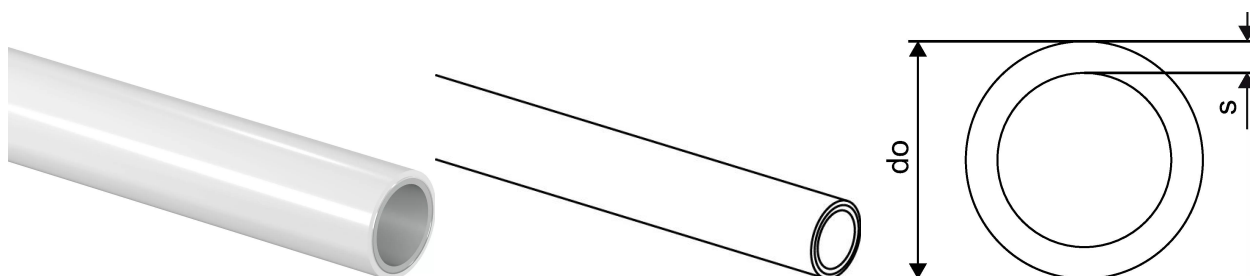

### Product code

Item no EAN	4021598016187
Item no GF	35001013366
Item no GTIN	04021598016187
Item no VVS	99999999

### Dimensions

Item Unit Height	14
Item Unit Length	1000
Item Unit Weight	0,091
Item Unit Width	14
Item_UOM	m

### Measurements

Outer Diameter_do	14
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905256587
Packaging GTIN PL4	06414905256594
Packaging Height PL1	190
Packaging Height PL4	1980
Packaging Length PL1	770
Packaging Length PL4	1200
Packaging Quantity PL1	200
Packaging Quantity PL4	2600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,112651
Packaging Volume PL4	1,9008
Packaging Weight PL1	19,3

Packaging Weight PL4	290,2
Packaging Width PL1	770
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)