


Uponor Uni Pipe PLUS white insulated S6 14x2,0 red 50m**1013577**

- Coil
- Insulation thickness 6 mm
- Thermal conductivity $\lambda=0,040$ W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

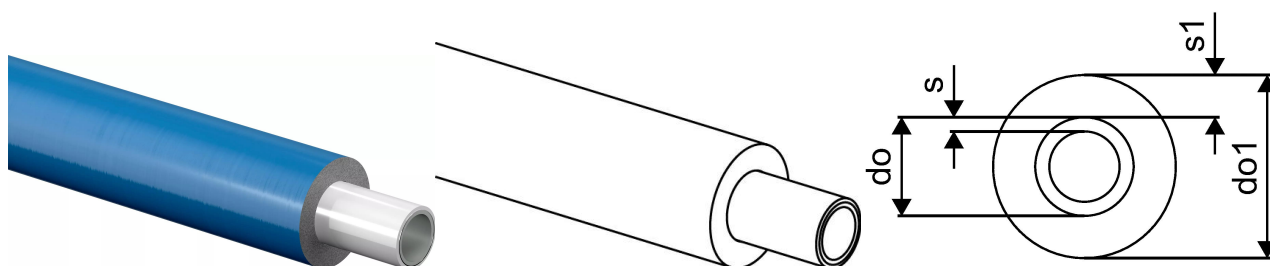

About Uponor Uni Pipe PLUS white insulated S6

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white insulated S6 14x2,0 red 50m

1013577

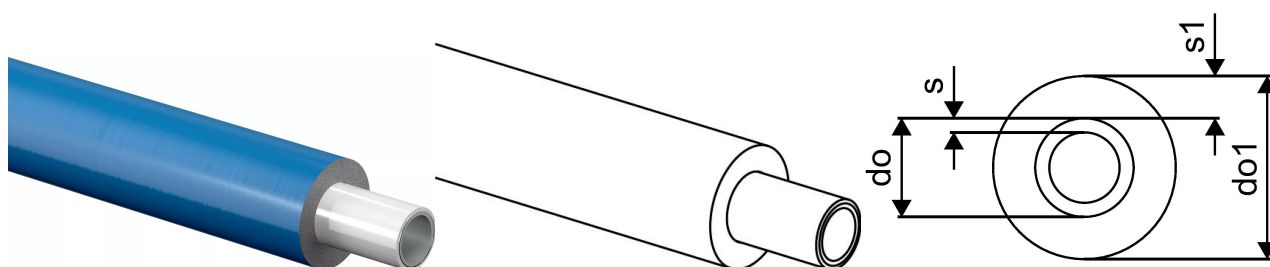

Product code

Item no EAN 4021598002531

Item no GTIN 04021598002531

Dimensions

Item Unit Height 26

Item Unit Length 1000

Item Unit Weight 0,253

Item Unit Width 26

Item_UOM m

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Measurements

Outer Diameter_ d_o 14

Wall thickness_ s 2

Wall thickness_ s_1 6

Packaging

Packaging GTIN PL1 06414905257201

Packaging GTIN PL4 06414905257218

Packaging Height PL1 190

Packaging Height PL4 2000

Packaging Length PL1 770

Packaging Length PL4 1200

Packaging Quantity PL1 50

Packaging Quantity PL4 600

Packaging Type PL1 Base_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,112651

Packaging Volume PL4 1,92

Packaging Weight PL1	13,75
Packaging Weight PL4	203,2
Packaging Width PL1	770
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb