
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S6 14x2,0 red 50m

1013577

- Coil
- Insulation thickness 6 mm
- Thermal conductivity λ=0,040 W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

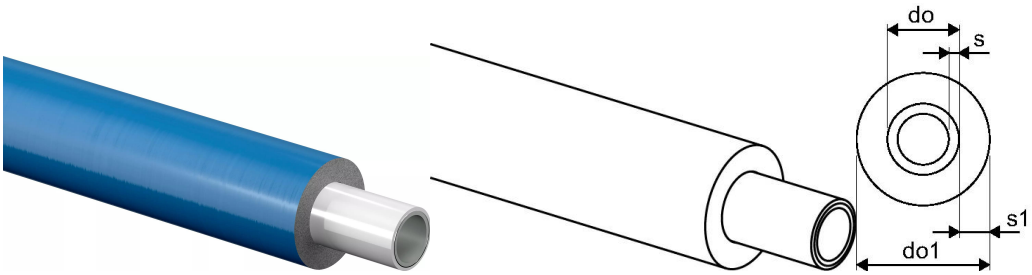

About GF Uponor Uni Pipe PLUS white insulated S6

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white insulated S6 14x2,0 red 50m

1013577

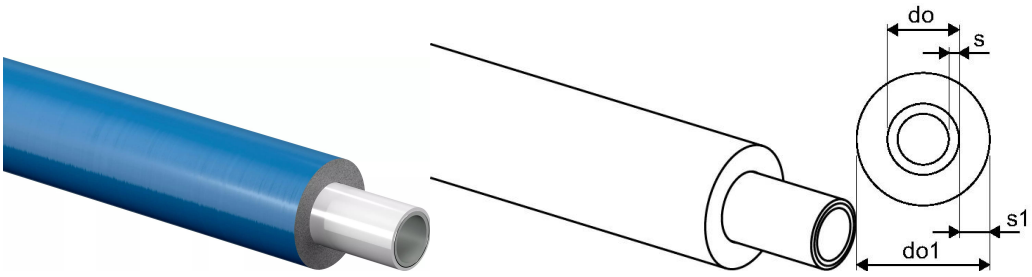

Product code

Item no EAN	4021598002531
Item no GTIN	04021598002531

Dimensions

Item Unit Height	26
Item Unit Length	1000
Item Unit Weight	0,253
Item Unit Width	26
Item_UOM	m

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Measurements

Outer Diameter_do	14
Outer Diameter_do1	26
Wall thickness_s	2
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905257201
Packaging GTIN PL4	06414905257218
Packaging Height PL1	190
Packaging Height PL4	2000
Packaging Length PL1	770
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,112651
Packaging Volume PL4	1,92
Packaging Weight PL1	13,75
Packaging Weight PL4	203,2
Packaging Width PL1	770
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+