Product data sheet



GF Uponor MLC pipe cutting tool blade

1013721

- for MLC pipes





About GF Uponor MLC pipe cutting tool blade

Specification


- Oxygen diffusion resistant multi-layer composite pipe(PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor MLC pipe cutting tool blade

1013721

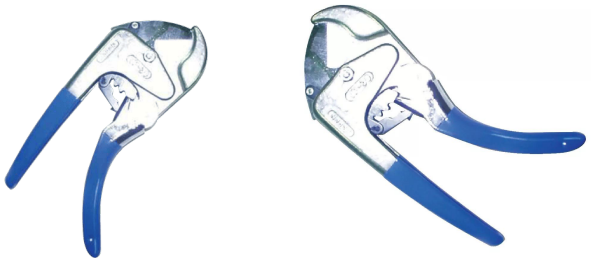

Product code

Item no EAN	4021598700871
Item no GF	35001013721
Item no GTIN	04021598700871
Item no VVS	045498492

Dimensions

Item Unit Height	2
Item Unit Length	90
Item Unit Weight	0,073
Item Unit Width	70
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905435128
Packaging GTIN PL3	06414905445233
Packaging Height PL1	3
Packaging Height PL3	50
Packaging Length PL1	135
Packaging Length PL3	137
Packaging Quantity PL1	1
Packaging Quantity PL3	10
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Volume PL1	0,000038475
Packaging Volume PL3	0,000685
Packaging Weight PL1	0,085
Packaging Weight PL3	0,875

Packaging Width PL1	95
Packaging Width PL3	100

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+