
Product data sheet




GF Uponor S-Press PLUS pressure testing plug 32

1013764

- Reuseable pressure test plug
- 1/2" female thread to attach [pressure test equipment

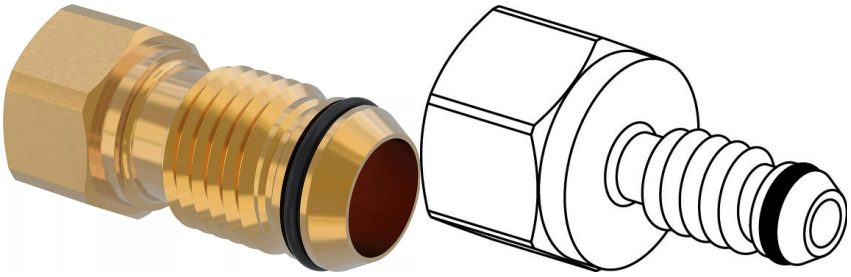



About GF Uponor S-Press PLUS pressure testing plug

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body


Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.

GF Uponor S-Press PLUS pressure testing plug 32

1013764

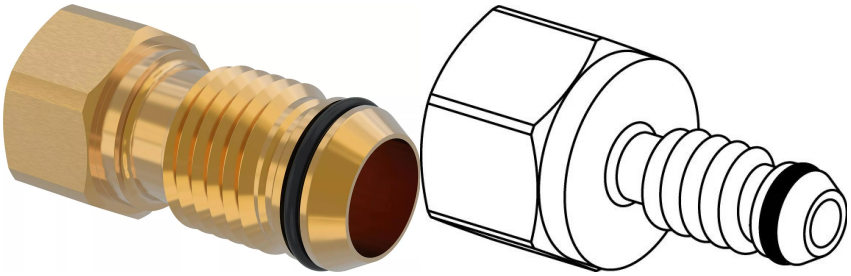



Measurements

Cylindric_thread_G	1/2
LENGTH_L	64
Length (l1)	14
Length (l2)	42
z1	8

Product code

Item no EAN	4021598036000
Item no GF	35001013764
Item no GTIN	04021598036000
Item no NRF	5071606
Item no RSK	1880294

Dimensions

Item Unit Height	30
Item Unit Length	64
Item Unit Weight	0,137
Item Unit Width	30
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905634743
Packaging GTIN PL4	06414905257867
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176

Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,408
Packaging Weight PL4	565,672
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+