
Product data sheet



GF Uponor S-Press PLUS pressure test plug O-ring 20

1013801

- spare sealing O-ring for pressure testing plug

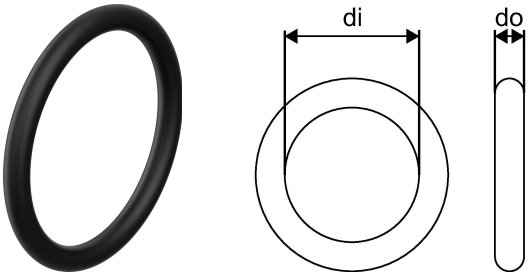

About GF Uponor S-Press PLUS pressure test plug O-ring

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body


Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.

GF Uponor S-Press PLUS pressure test plug O-ring 20

1013801

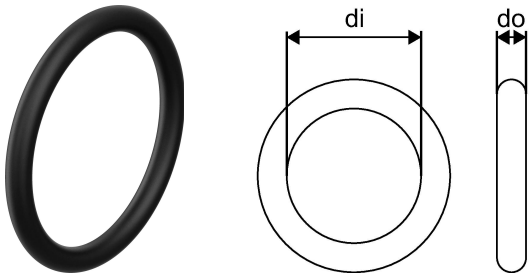

Measurements

Inner_diameter_di	12
Outer Diameter_do	1,8

Product code

Item no EAN	4021598501737
Item no GF	35001013801
Item no GTIN	04021598501737
Item no RSK	1897962

Dimensions

Item Unit Height	2
Item Unit Length	14
Item Unit Weight	0,001
Item Unit Width	14
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905435258
Packaging GTIN PL3	06414905445264
Packaging GTIN PL4	06414905488773
Packaging Height PL1	5
Packaging Height PL3	240
Packaging Height PL4	320
Packaging Length PL1	60
Packaging Length PL3	410
Packaging Length PL4	1200

Packaging Material (number) PL1	4
Packaging Material (number) PL3	4
Packaging Material PL1	Low density polyethylene
Packaging Material PL3	Corrugated fibreboard
Packaging Material (short) PL1	LDPE
Packaging Material (short) PL3	PAP
Packaging Quantity PL1	10
Packaging Quantity PL3	1000
Packaging Quantity PL4	10000
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000018
Packaging Volume PL3	0,021156
Packaging Volume PL4	0,3072
Packaging Weight PL1	0,06
Packaging Weight PL3	6,1
Packaging Weight PL4	86
Packaging Width PL1	60
Packaging Width PL3	215
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL3	Corrugated fibreboard

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+