


## Uponor S-Press PLUS pressure test plug O-ring 25

### 1013802

- as spare part for pressure testing plug

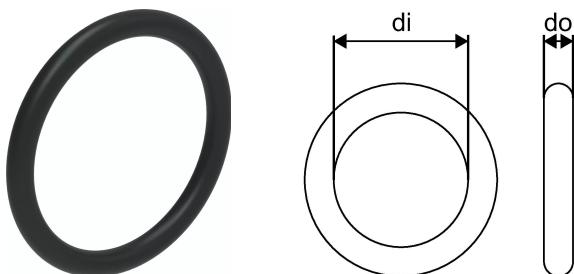

## About Uponor S-Press PLUS pressure test plug O-ring

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass  
if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor S-Press PLUS pressure test plug O-ring 25 1013802

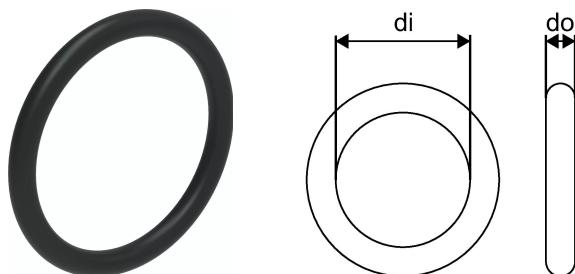

### Measurements

Inner_diameter_di	16
Outer Diameter_do	2

### Product code

Item no EAN	4021598501744
Item no GF	35001013802
Item no GTIN	04021598501744
Item no RSK	1897963

### Dimensions

Item Unit Height	20
Item Unit Length	20
Item Unit Weight	0,001
Item Unit Width	2
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905257980
Packaging GTIN PL3	06414905257997
Packaging GTIN PL4	06414905258000
Packaging Height PL1	10
Packaging Height PL3	89
Packaging Height PL4	570
Packaging Length PL1	60
Packaging Length PL3	176
Packaging Length PL4	1120
Packaging Quantity PL1	10
Packaging Quantity PL3	500

Packaging Quantity PL4	10000
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000024
Packaging Volume PL3	0,00211464
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,01
Packaging Weight PL3	0,539
Packaging Weight PL4	46,829
Packaging Width PL1	40
Packaging Width PL3	135
Packaging Width PL4	748

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)