


Uponor S-Press PLUS pressure test plug O-ring 32

1013803

- as spare part for pressure testing plug

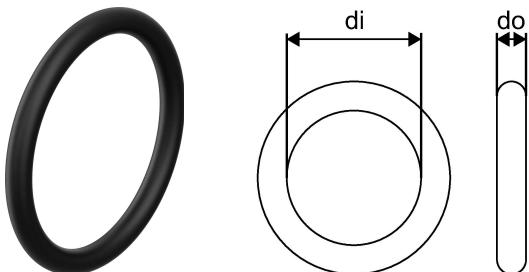

About Uponor S-Press PLUS pressure test plug O-ring

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS pressure test plug O-ring 32 1013803

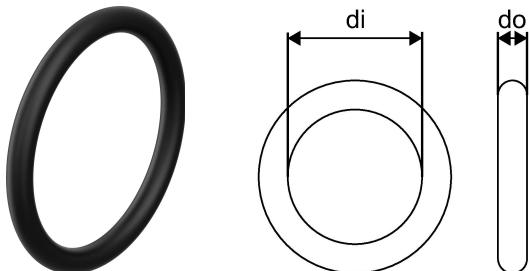

Measurements

Inner_diameter_di	21,3
Outer Diameter_do	2,3

Product code

Item no EAN	4021598036482
Item no GF	35001013803
Item no GTIN	04021598036482
Item no RSK	1897964

Dimensions

Item Unit Height	2
Item Unit Length	25
Item Unit Weight	0,001
Item Unit Width	25
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905435265
Packaging GTIN PL3	06414905445271
Packaging Height PL1	5
Packaging Height PL3	100
Packaging Length PL1	150
Packaging Length PL3	175
Packaging Quantity PL1	10
Packaging Quantity PL3	500
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,00008625

Packaging Volume PL3	0,0035
Packaging Weight PL1	0,01
Packaging Weight PL3	0,5
Packaging Width PL1	115
Packaging Width PL3	200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb