
Product data sheet



GF Uponor S-Press PLUS pressure test plug O-ring 40

1013804

- spare sealing O-ring for pressure testing plug

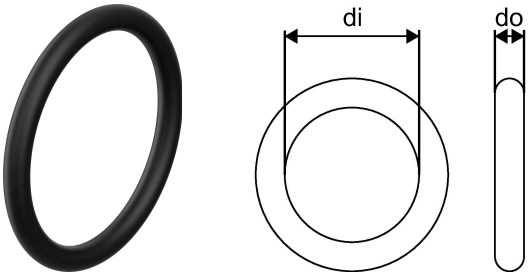

About GF Uponor S-Press PLUS pressure test plug O-ring

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body


Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.

GF Uponor S-Press PLUS pressure test plug O-ring 40

1013804

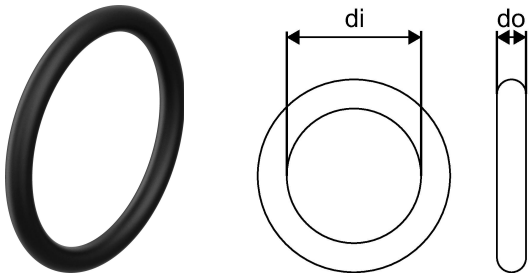

Measurements

Inner_diameter_di	27,3
Outer Diameter_do	2

Product code

Item no EAN	4021598036499
Item no GF	35001013804
Item no GTIN	04021598036499
Item no RSK	1897965

Dimensions

Item Unit Height	2
Item Unit Length	32
Item Unit Weight	0,001
Item Unit Width	32
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905435272
Packaging Height PL1	10
Packaging Length PL1	45
Packaging Quantity PL1	10
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00007875
Packaging Weight PL1	0,02
Packaging Width PL1	175

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+