
Product data sheet




GF Uponor Uni-X compression adapter MLC UK 20-22mmFT

1013807

- For connection of Uni-Pipe PLUS and MLC to Uni-C manifolds
- Demountable and resealable
- Union nut and insert
- Pipe must be calibrated, no bevel

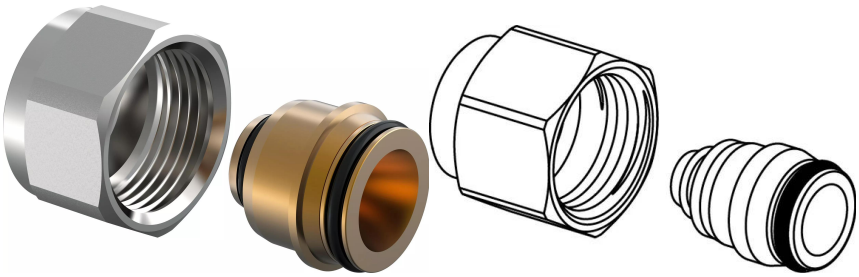

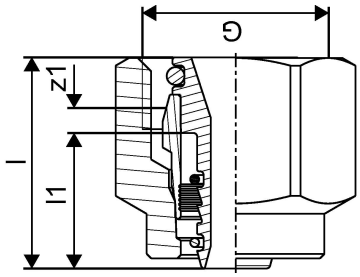

About GF Uponor Uni-X compression adapter MLC UK

Specification


- Compression fittings with eurocone and metric connections
- Made of brass or tin-plated brass depending on variant
- Compatible with Uponor Uni Pipe PLUS and MLC pipes
- Female and male thread options according to EN ISO 228-1
- No bevel required for installation


Application

For connection of
- drinking water systems
- heating systems
- radiant heating and cooling systems

GF Uponor Uni-X compression adapter MLC UK 20-22mmFT

1013807

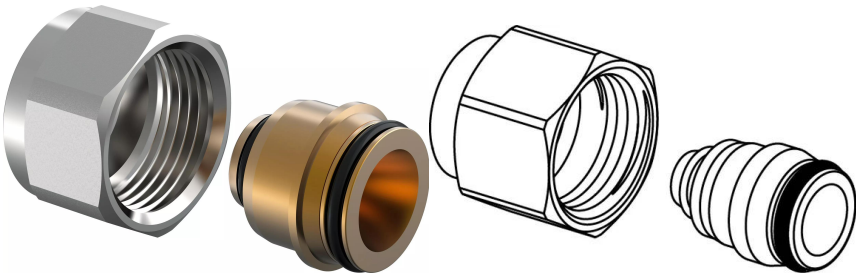

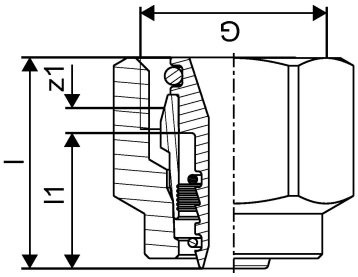

Measurements

Cylindric_thread_G	W1 1/8
LENGTH_L	24,2
Length (l1)	15,2
z1	3,5

Product code

Item no EAN	4021598000117
Item no GF	35001013807
Item no GTIN	04021598000117

Dimensions

Item Unit Height	7.5
Item Unit Length	7.5
Item Unit Weight	0,099
Item Unit Width	10
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905258161
Packaging GTIN PL4	06414905258178
Packaging Height PL1	89
Packaging Height PL4	580
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,5568
Packaging Weight PL1	0,997
Packaging Weight PL4	392,949
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+