
Product data sheet




GF Uponor Uni-X compression adapter MLC UK 25-28mmFT

1013808

- For connection of Uni-Pipe PLUS and MLC to Uni-C manifolds
- Demountable and resealable
- Union nut and insert
- Pipe must be calibrated, no bevel

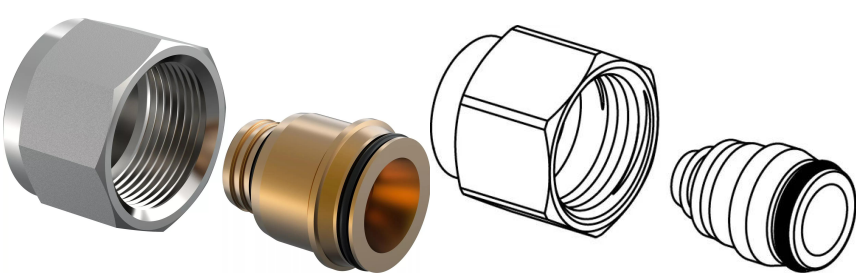

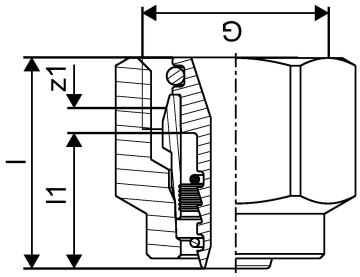

About GF Uponor Uni-X compression adapter MLC UK

Specification


- Compression fittings with eurocone and metric connections
- Made of brass or tin-plated brass depending on variant
- Compatible with Uponor Uni Pipe PLUS and MLC pipes
- Female and male thread options according to EN ISO 228-1
- No bevel required for installation


Application

For connection of
- drinking water systems
- heating systems
- radiant heating and cooling systems

GF Uponor Uni-X compression adapter MLC UK 25-28mmFT

1013808

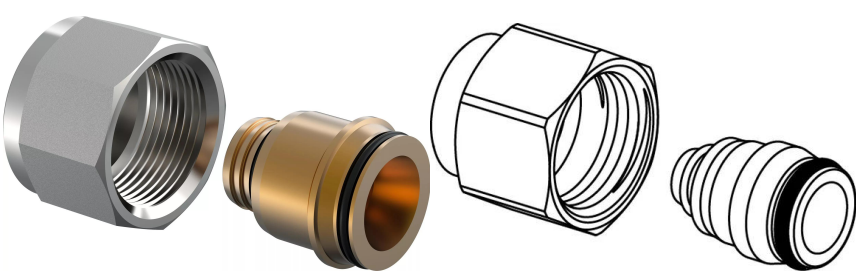

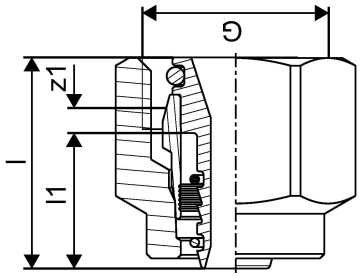

Measurements

Cylindric_thread_G	W1 1/8
LENGTH_L	36
Length (l1)	23,5
z1	6,9

Product code

Item no EAN	4021598001244
Item no GTIN	04021598001244

Dimensions

Item Unit Height	38
Item Unit Length	42
Item Unit Weight	0,226
Item Unit Width	42
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905258185
Packaging GTIN PL4	06414905258192
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464

Packaging Volume PL4	0,65088
Packaging Weight PL1	2,36
Packaging Weight PL4	478,12
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+