


## Uponor Uni-X compression adapter plated MLC UK 12-15mmFT

### 1013813

- For connection of Uni-Pipe PLUS and MLC to standard compression fitting bodies to BS EN 1254-2
- Demountable and resealable
- Union nut and insert
- Pipe must be calibrated, no bevel
- Note, threads on fitting body must be checked to confirm suitable length to accommodate the necessary number of turns for the nut

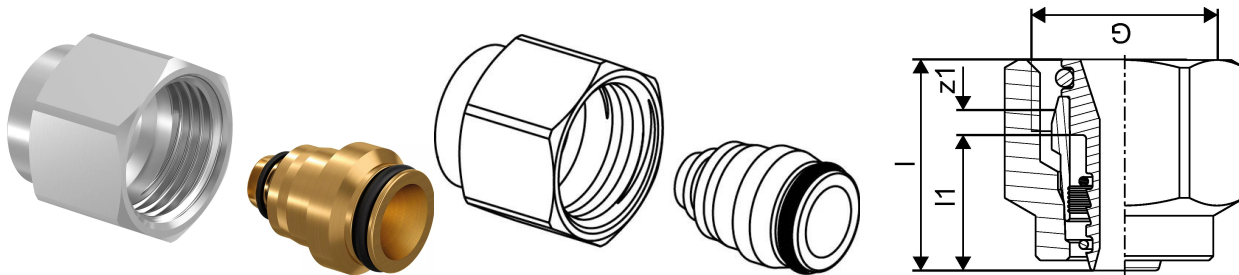

### About Uponor Uni-X compression adapter plated MLC UK

#### Specification

- Compression fittings with eurocone and metric connections
- Made of brass or tin-plated brass depending on variant
- Compatible with Uponor Uni Pipe PLUS and MLC pipes
- Female and male thread options according to EN ISO 228-1
- No bevel required for installation


#### Application

For connection of

- drinking water systems
- heating systems
- radiant heating and cooling systems

## Uponor Uni-X compression adapter plated MLC UK 12-15mmFT

1013813

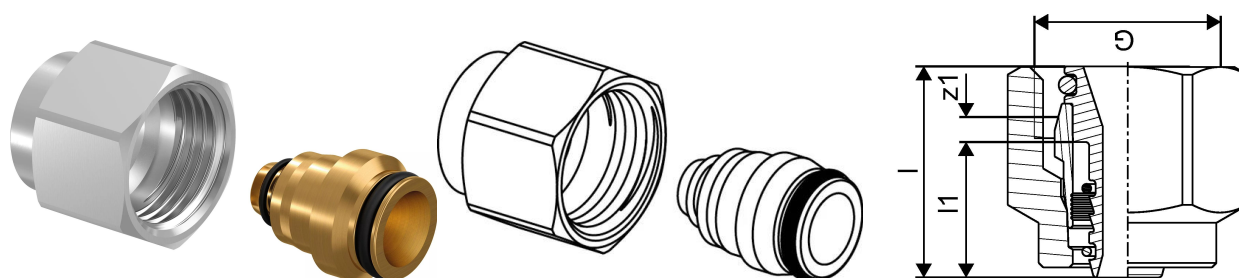

### Measurements

Cylindric_thread_G	1/2
LENGTH_L	23,7
Length (l1)	15,2
z1	3,4

### Product code

Item no EAN	4021598003279
Item no GTIN	04021598003279

### Dimensions

Item Unit Height	27
Item Unit Length	23
Item Unit Weight	0,041
Item Unit Width	27
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905258208
Packaging GTIN PL4	06414905258215
Packaging Height PL1	89
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	20
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,857

Packaging Weight PL4	466,445
Packaging Width PL1	67
Packaging Width PL4	748

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)