


Uponor Uni-X compression adapter MLC UK 12-15mmFT

1013831

- For connection of Uni-Pipe PLUS and MLC to Uni-C manifolds
- Demountable and resealable
- Union nut and insert
- Pipe must be calibrated, no bevel

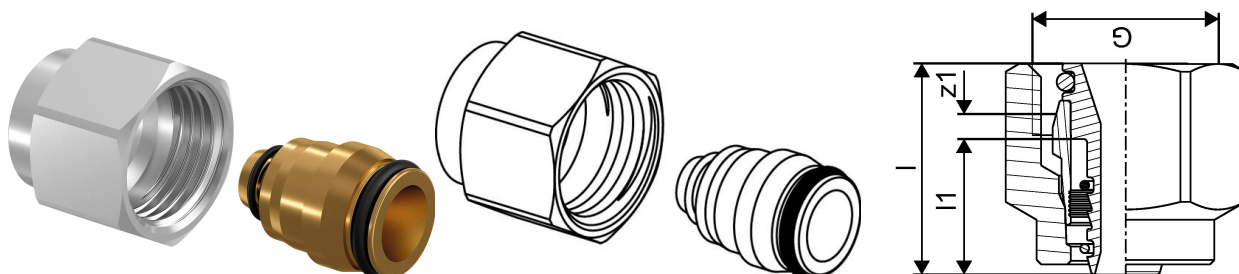

About Uponor Uni-X compression adapter MLC UK

Specification

- Compression fittings with eurocone and metric connections
- Made of brass or tin-plated brass depending on variant
- Compatible with Uponor Uni Pipe PLUS and MLC pipes
- Female and male thread options according to EN ISO 228-1
- No bevel required for installation


Application

For connection of

- drinking water systems
- heating systems
- radiant heating and cooling systems

Uponor Uni-X compression adapter MLC UK 12-15mmFT

1013831

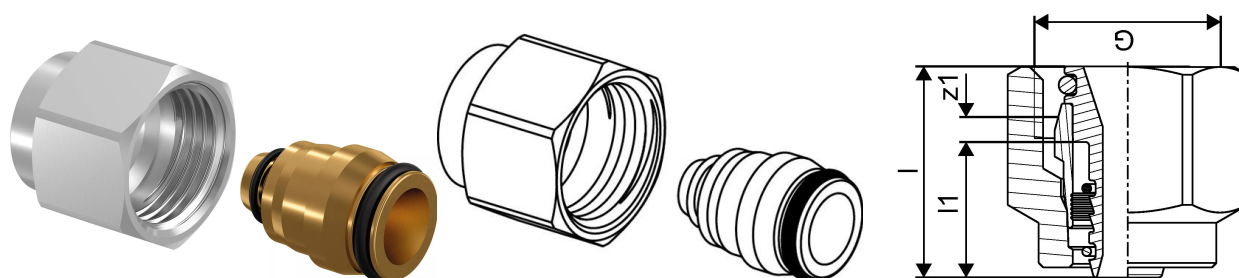

Measurements

Cylindric_thread_G	1/2
LENGTH_L	23,7
Length (l1)	15,2
z1	2,8

Product code

Item no EAN	4021598003262
Item no GTIN	04021598003262

Dimensions

Item Unit Height	24
Item Unit Length	23
Item Unit Weight	0,057
Item Unit Width	24
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905258345
Packaging GTIN PL3	06414905258352
Packaging GTIN PL4	06414905258369
Packaging Height PL1	89
Packaging Height PL3	165
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL3	230
Packaging Length PL4	1120
Packaging Quantity PL1	20
Packaging Quantity PL3	160
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box

Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,00626175
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,157
Packaging Weight PL3	187,252
Packaging Weight PL4	459,533
Packaging Width PL1	67
Packaging Width PL3	165
Packaging Width PL4	748

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb