


## Uponor S-Press adapter 14-15CU

### 1014511

- Made of tin plated brass
- Contoured aluminium sleeve with inspection windows
- With copper pipe 15 x 1mm - EN 1057
- The connection of the plated copper pipe can be made using a standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

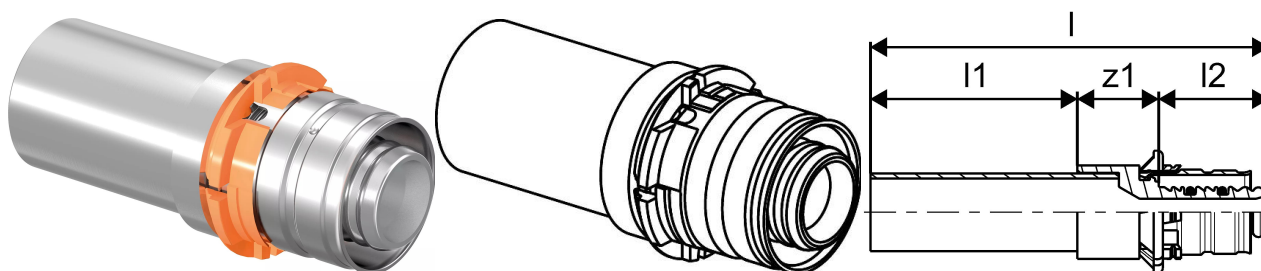

## About Uponor S-Press adapter

### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press adapter 14-15CU

1014511

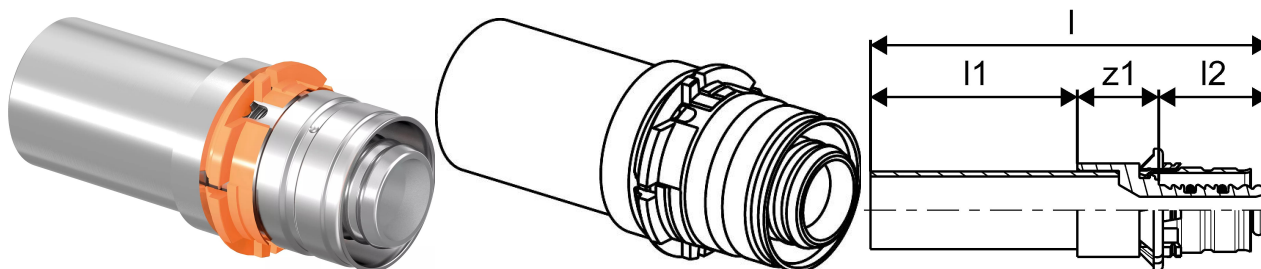

### Product code

Item no EAN 4021598036062

Item no GTIN 04021598036062

### Dimensions

Item Unit Height 24

Item Unit Length 77

Item Unit Weight 0,042

Item Unit Width 24

Item\_UOM pce

### Measurements

LENGTH\_L 77

Length (l1) 40

Length (l2) 21,3

z1 15,7

### Packaging

Packaging GTIN PL1 06414905435401

Packaging GTIN PL3 06414905445363

Packaging GTIN PL4 06414905488926

Packaging Height PL1 89

Packaging Height PL3 95

Packaging Height PL4 570

Packaging Length PL1 176

Packaging Length PL3 277

Packaging Length PL4 1120

Packaging Quantity PL1 10

Packaging Quantity PL3 80

Packaging Quantity PL4 7680

Packaging Type PL1 Base\_Box

Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,448
Packaging Weight PL3	3,69
Packaging Weight PL4	354,24
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	748

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)