
Product data sheet



GF Uponor S-Press adapter 14-15CU

1014511

- Made of tin plated brass
- Contoured aluminium sleeve with inspection windows
- With copper pipe 15 x 1mm - EN 1057
- The connection of the plated copper pipe can be made using a standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

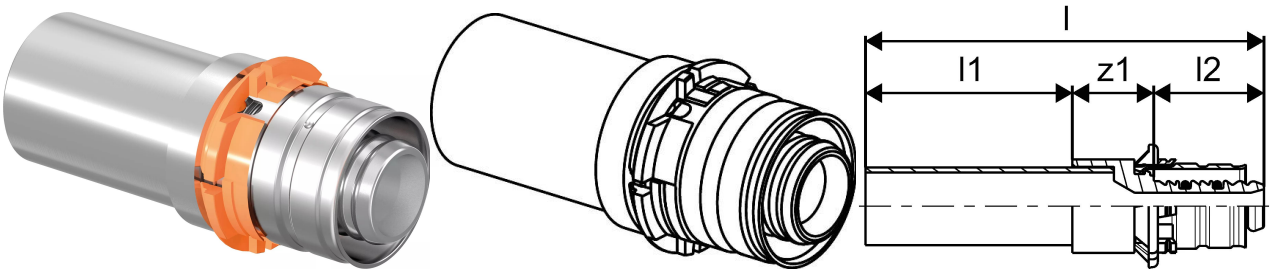

About GF Uponor S-Press adapter

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter 14-15CU

1014511

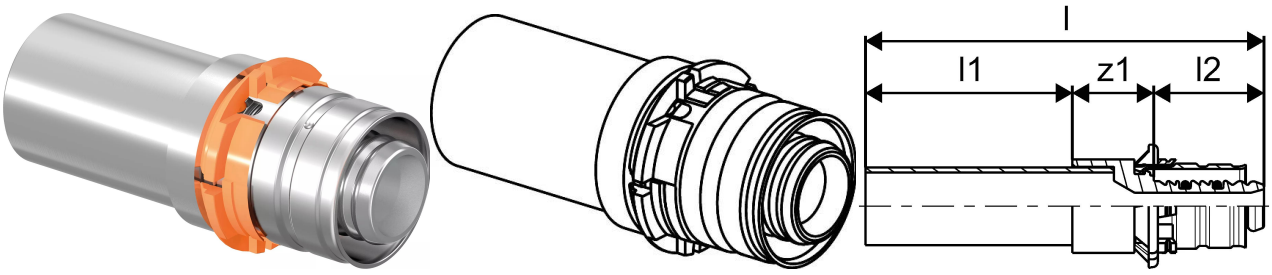

Product code

Item no EAN	4021598036062
Item no GTIN	04021598036062

Dimensions

Item Unit Height	24
Item Unit Length	77
Item Unit Weight	0,042
Item Unit Width	24
Item_UOM	pce

Measurements

LENGTH_L	77
Length (l1)	40
Length (l2)	21,3
z1	15,7

Packaging

Packaging GTIN PL1	06414905435401
Packaging GTIN PL3	06414905445363
Packaging GTIN PL4	06414905488926
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1120
Packaging Quantity PL1	10
Packaging Quantity PL3	80

Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,448
Packaging Weight PL3	3,69
Packaging Weight PL4	354,24
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	748

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+