


## Uponor S-Press adapter male thread 14-R1/2"MT

### 1014513

- Made of tin-plated brass
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code

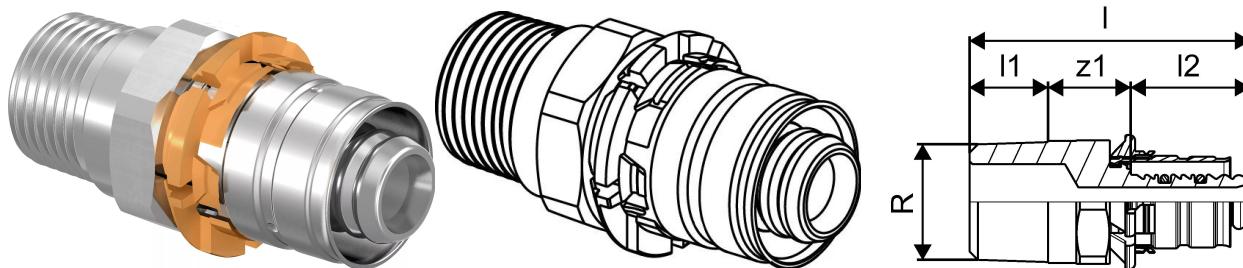

## About Uponor S-Press adapter male thread

### Specification

- with fixed press sleeve
- stop ring
- test safety



### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)
- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar
- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.
- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'
- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass
- if not different mentioned:
  - Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC
- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC
- KIWA – UK water Regulation 4
- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press adapter male thread 14-R1/2"MT 1014513

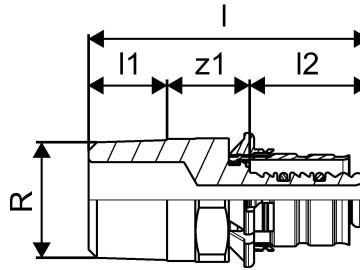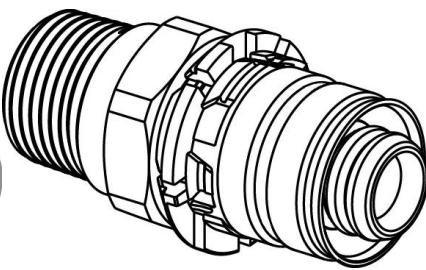

### Product code

Item no EAN	4021598300866
-------------	---------------

Item no GTIN	04021598300866
--------------	----------------

### Dimensions

Item Unit Height	20
Item Unit Length	50
Item Unit Weight	0,06
Item Unit Width	20
Item_UOM	pce

### Measurements

LENGTH_L	50
Length (I1)	14
Length (I2)	22
Male_thread_R	1/2
z1	11

### Packaging

Packaging GTIN PL1	06414905634804
Packaging GTIN PL3	06414905445370
Packaging GTIN PL4	06414905488933
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680

Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	1,238
Packaging Weight PL3	5,052
Packaging Weight PL4	509,992
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)